

PHILIPS SERVICE

461 A-04


198—585 m
720—2000 m

9656 Z = 5 Ω

110 V, 125 V, 145 V,
200 V, 220 V, 245 V.


128 kc/s

55 W



<p>720—2000 m I</p> <p>VOL. max.</p> <p>128 kc/s-33000 pF-g1B2</p> <p>C26, C25 max.</p> <p>128 kc/s-33000 pF-g4B1</p> <p>C21, C22 max.</p>	<p>720—2000 m II</p> <p>VOL. max.</p> <p>C4, C5, C6 2000 m</p> <p>128 kc/s — Y</p> <p>C37 min.</p>	<p>198—585 m III</p> <p>C4, C5, C6 + 15°</p> <p>VOL. max.</p> <p>1442 kc/s — Y</p> <p>CL2, C7, C8 max. : </p>
		<p>720—2000 m III</p> <p>C4, C5, C6 + 15°</p> <p>VOL. max.</p> <p>414 kc/s — Y</p> <p>C9 max.</p>
		<p>198—585 m V</p> <p>810 kc/s — Y</p> <p>C4, C5, C6 810 kc/s</p> <p>370 m</p>

15° 09 992 44.0

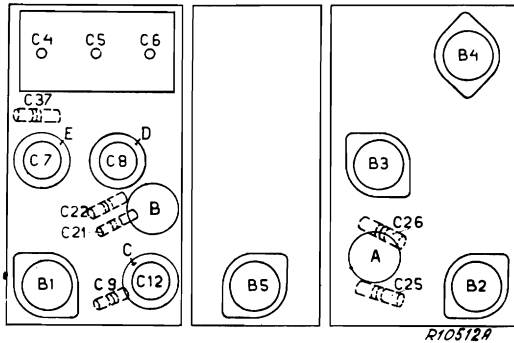


R1	2000 Ω	48 468 10/2K	C1	32 μF	28 182 40.0
R2	47 Ω	48 425 10/47E	C2	32 μF	28 182 40.0
R3	0,1 MΩ	48 425 10/100K	C3	25 μF	28 182 24.1
R4	47000 Ω	48 425 10/47K	C4	11-490 pF)	
R5	16000 Ω	28 803 08.0	C5	11-490 pF)	28 212 19.0
R7	270 Ω	48 425 10/270E	C6	11-490 pF)	
R8	0,39 MΩ	48 425 10/390K	C7	2,5-30 pF	
R9	0,35 MΩ	49 500 55.0	C8	2,5-30 pF	
R11	1,5 MΩ	48 426 10/1M5	C9	32 pF	28 212 06.2
R12	2200 Ω	48 425 10/2K2	C10	22 pF	48 406 10/22E
R13	3900 Ω	48 425 10/3K9	C11	47 pF	48 406 10/47E
R14	1,5 MΩ	48 426 10/1M5	C12	2,5-30 pF	
R15	27000 Ω	48 425 10/27K	C14	15000 pF	48 751 10/15K
R16	0,47 MΩ	48 425 10/470K	C15	39000 pF	48 751 10/39K
R17	0,22 MΩ	48 425 10/220K	C16	47000 pF	48 751 10/47K
R18	0,82 MΩ	48 425 10/820K	C17	2 pF	28 205 88.0
R19	1000 Ω	48 425 10/1K	C18	1425 pF	48 429 02/1K425
R20	150 Ω	48 426 10/150E	C19	770 pF	48 429 02/770E
R21	0,82 MΩ	48 425 10/820K	C20	0,1 μF	48 751 10/100K
R22	50000 Ω	28 812 50.1	C21	32 pF	28 212 06.2
R23	330 Ω	48 425 10/330E	C22	32 pF	28 212 06.2
R24	100 Ω	48 425 10/100E	C23	0,1 μF	48 751 10/100K
R25	0,1 MΩ	48 425 10/100K	C24	0,1 μF	48 751 10/100K
			C25	32 pF	28 212 06.2
			C26	32 pF	28 212 06.2
			C28	22 pF	48 406 10/22E
			C29	100 pF	48 406 10/100E
			C30	10000 pF	48 751 10/10K
			C32	10000 pF	48 751 10/10K
			C33	32 pF	48 429 10/32E
			C34	40 pF	48 429 10/40E
			C35	50 pF	48 429 10/50E
			C36	68 pF	48 406 10/68E
			C38	250 pF	48 429 10/250E
			C39	47000 pF	48 757 20/47K
			C40	2200 pF	48 751 10/2K2
			C41	100 pF	48 406 10/100E
			C42	0,1 μF	48 751 10/100K
			C47	68000 pF	48 751 10/68K
			C48	20000 pF	28 201 65.0
			C56	47000 pF	48 751 10/47K

	B1	B2	B3	B4	B5	
	AK 2	AF 3	ABC 1	AL 4	AZ 1	
Va	230	230	65	250		V
Vg2	87	87	—	230		V
Vg3(5)	87	—	—	—		V
-Vg	2,8	2,3	2,3	5		V
Ia	1,8	6,8	0,56	37		mA
Ig2	2	2,6	—	4,7		mA
Ig3(5)	4,2	—	—	—		mA


VC1 = 275 V
VC2 = 230 V
VkB3 = 16 V

Copyright - N.V. Philips'
Gloeilampenfabrieken Eindhoven, Holland
Imprimé en Hollande


93.950.70

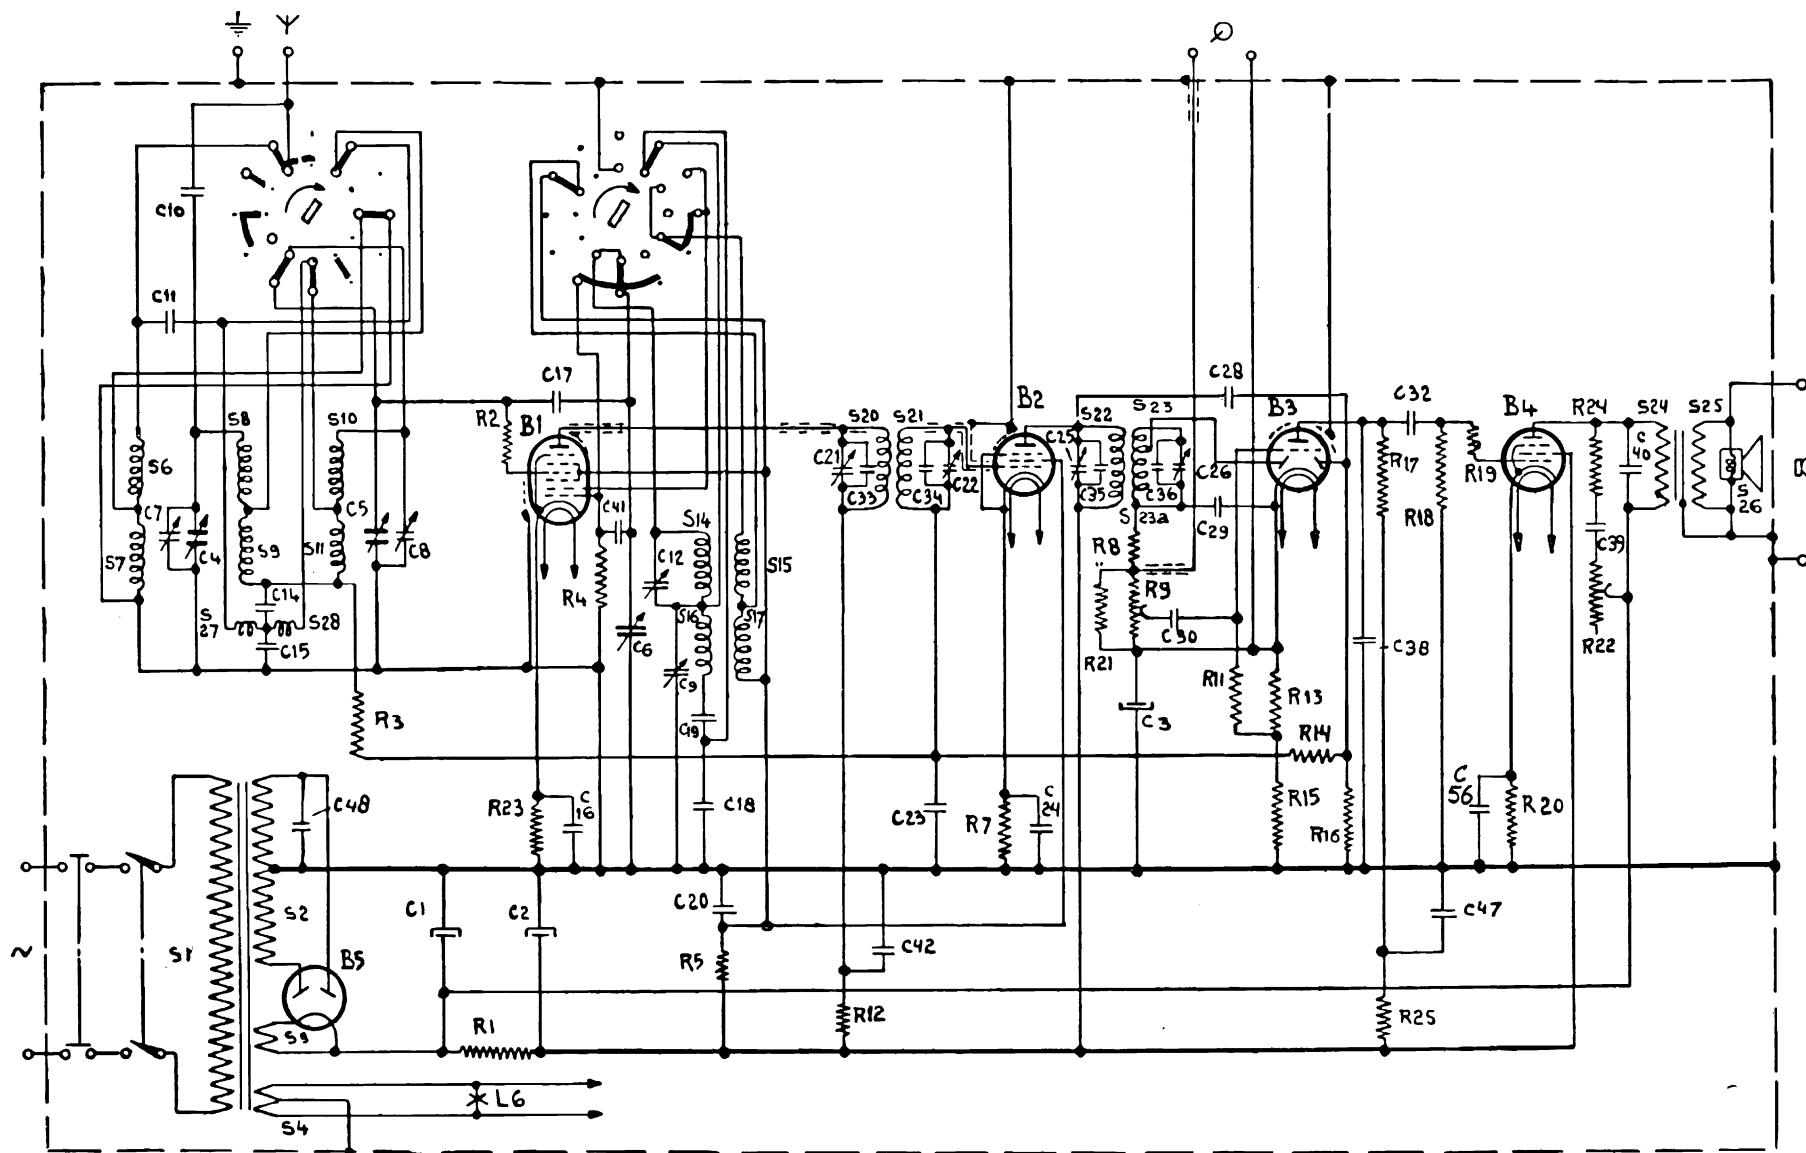


R11051




B1




B2




B3




B4




B5




A




B



C



D



E R10720A