

# PHILIPS-SERVICE

# 572 A


200- 550 m  
800-1900 m

572 A-2 104 kc/s  
572 A-4 115 kc/s

4283 Z = 9 Ω



103-253 V.

47 W

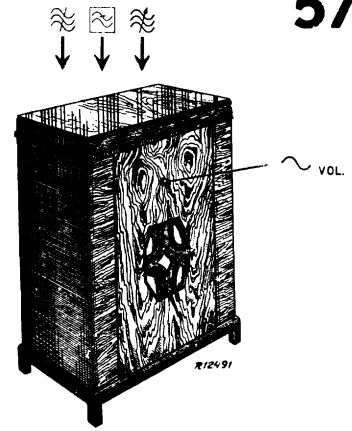

1932

800-1900 m I	800-1900 m II	800-1900 m III
VOL max 104 kc/s-220 pF.g4B1 A4-115 kc/s R1 C9, C10, C11 min S14-20000 Ω S17-20000 Ω C23, C24 max S14, S17 S15-20000 Ω S16-20000 Ω C22, C25 max S15, S16 R1	VOL max R1 104 kc/s- Y A4-115 kc/s C9, C10, C11 ( ) 1900 m C33 min R1 200-550 III S14-20000 Ω VOL max 1333 kc/s-g4B1 C9, C10, C11 ( ) 1229kc/s A4-1218 kc/s 1333 kc/s- Y C12, C13 max S14	S14-20000 Ω -25 pF-aB1 R1 333 kc/s- Y C9, C10, C11 ( ) 333 kc/s R1 VOL max C17 max S14 200-550 m V 857 kc/s- Y VOL max C9, C10, C11 ( ) 350 m 350 m

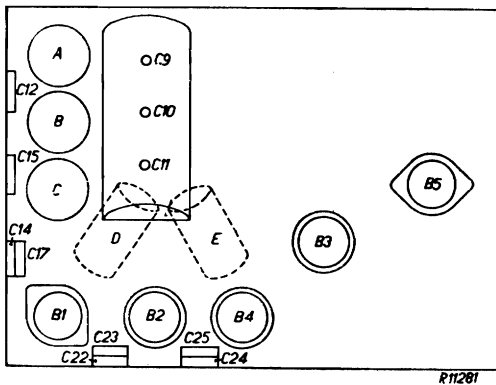

	B 1	B 2	B 3	B 4	B 5	B 6	
	AK 1	AF 2	AB 1	E 446	E 463	1823	
Va	275	275		135	240		V
Vg2	87	87		85	252		V
Vg3,5	87	—		—	—		V
-Vg	1,45	2		3,3	24		V
Ia	1,6	2,13		0,37	34		mA
Ig 2	1,75	0,95		0,17	3,6		mA
Ig 3,5	3,45	—		—	—		mA

Copyright  
N.V. Philips Gloeilampenfabrieken, Eindhoven  
Imprimé en Hollande

) A-2  
) A-4


R1	47000 Ω	48 426 10/47K	C1	25 μF	48 312 09/25
R4	0,1 M/3Ω	48 427 10/100K	C2	25 μF	48 312 09/25
R5	220 Ω	48 426 10/220E	C3	1 μF	28 160 211
R6	6800 Ω	48 426 10/6K8	C4	0,5 μF	48 751 10/47K
R7	1200/2 Ω	48 427 10/1K2	C5	47000 pF	28 180 020*
R8	10000 Ω	48 426 10/10K	C6	25 μF	28 180 020*
R9	1 MΩ	48 426 10/1M	C7	25 μF	48 429 10/25E
R10	0,33 MΩ	48 426 10/1M	C8	27 pF	48 429 10/25E
R11	0,68 MΩ	48 426 10/680K	C9	0-430 pF	
R12	0,56 MΩ	48 426 10/560K	C10	0-430 pF	49 001 14.0
R13	1 MΩ	48 426 10/1M	C11	0-430 pF	
R14	0,33 MΩ	48 552 10/330K	C12	125 pF	49 005 52.2
R15	0,5 MΩ	28 810.14*	C13	125 pF	49 005 52.2
R16	680 Ω	48 426 10/680E	C14	7-55 pF	
R17	64000 Ω	28 808 520*	C17	7-55 pF	28 210 44.0
R18	68000 Ω	48 426 10/68K	C15 <sup>1)</sup>	1090 pF	48 429 02/1K09
R19	22000 Ω	48 426 10/22K	C16 <sup>2)</sup>	2185 pF	4842902/2K185
			C15 <sup>3)</sup>	930 pF	48 429 02/930E
			C16 <sup>4)</sup>	1810 pF	48 429 02/1K81
			C18	25000 pF	28 198 400*
			C19	25000 pF	28 198 400*
			C22	40-145 pF	28 210 550*
			C23	40-145 pF	
			C24	40-145 pF	28 210 550*
			C25	40-145 pF	
			C26	0,1 μF	48 751 10/100K
			C27	10000 pF	48 751 10/10K
			C28	2200 pF	48 751 10/2K2
			C29	10000 pF	48 751 10/10K
			C30	200 pF	48 429 10/200E
			C31	100 pF	48 429 10/100E
			C32	0,1 μF	48 751 10/100K
			C33	40-145 pF	28 210 520*
			C34	33000 pF	48 751 10/33K
			C35	0,1 μF	48 751 10/100K


  

A	2952		
B	2984		

S1, S2, S3, S4	28 522 20.0*	S16, S17	28 561 22.1*
S6, S7	28 561 02.2*	S18, S19	28 520 91.0*
S8, S9	28 561 03.2*	S20	28 830 04.0*
S10, S11, S12,		S21	28 561 27.1*
S13	28 561 04.4*	S22	28 545 19.1
S14, S15	28 561 22.1*	S23	28 561 93.0*





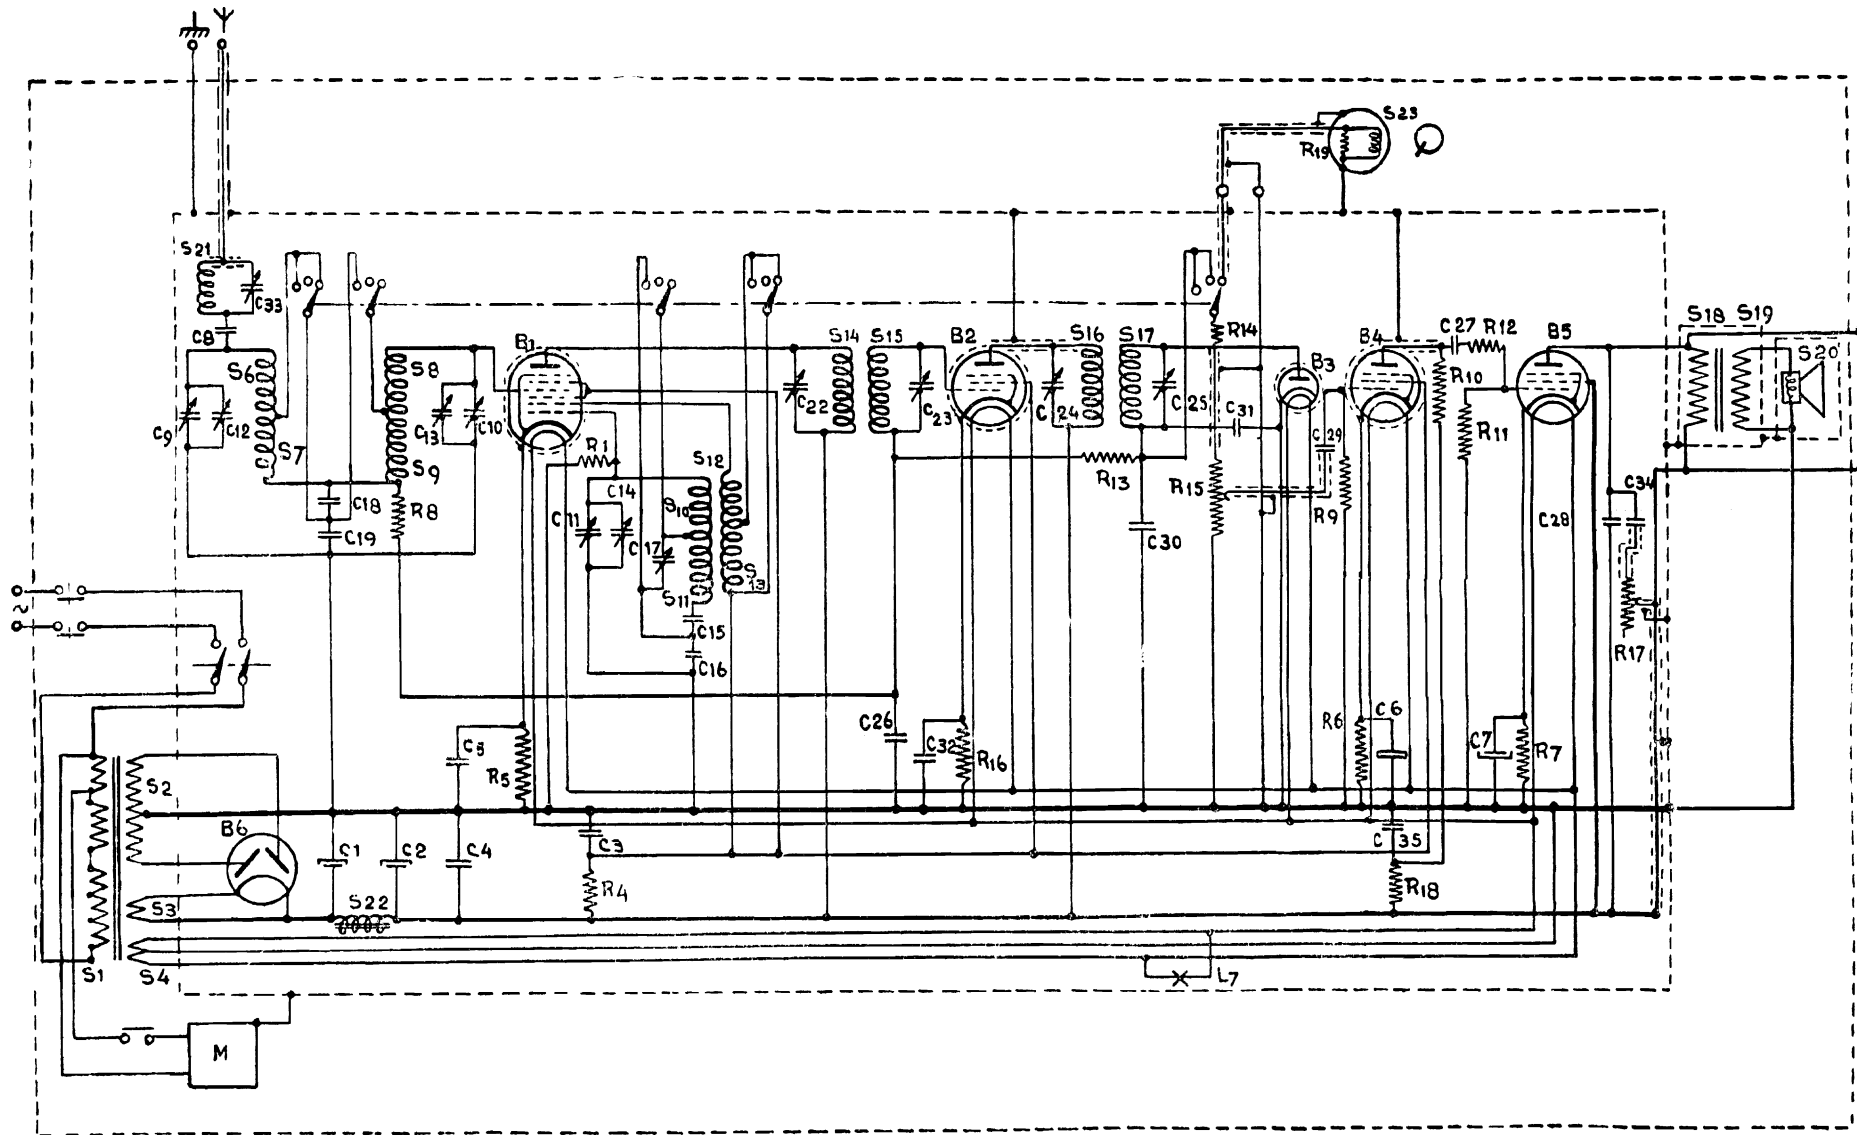R 12550

