

PHILIPS-SERVICE


655 A

13.8—50.5 m

186—585 m


707—2000 m

9682, Z = 5 Ω
9636, Z = 5 Ω
110 V, 125 V, 145 V,
200 V, 225 V, 245 V
48 watt

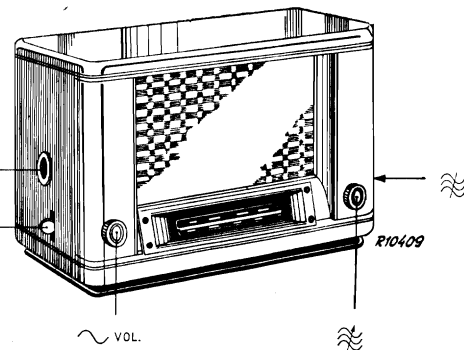

186—585 m	A	186—585 m	B	708—2000 m	C
C6, C7, C8	186 m	C6, C7, C8 + 15°		C6, C7, C8 max.	
128 kc/s-32000 pF-g1B2		1600 kc/s—		128 kc/s—	
C51—80 pF		C38, C28, C18 max		C91 min.	
C52 max.					
C51					
S52—80 pF					
C51 max.					
S52					
C61—80 pF					
C62 max.					
C61					
C62—80 pF					
C61 max.					
C62					


15° - 09 992 44.0

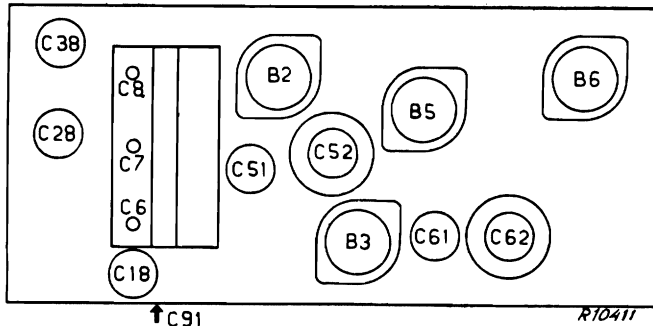

	B2	B3	B5	B6
	ECH 3	EF 9	EBL 1	AZ 1
Va	aH 230 aT 70	230	240	
Vg2 (4)	100	80	230	
Vk	2	2	16,5	
Ia	aH 1,2 aT 4,8	4,6	30	
Ig2 (4)	1,3	1,4	5	

C1	50 μF	49 029 01.0	R1	1800 Ω	49 356 30.0
C2	15 μF		R2	8200 Ω	49 357 38.0
C6	11-490 pF		R2a	8200 Ω	49 357 38.0
C7	11-490 pF	28 212 30.0	R11	0,65 MΩ	49 500 19.0
C8	11-490 pF		R12	0,2 MΩ	49 375 44.0
C18	20 pF	49 005 05.2	R13	47000 Ω	49 376 60.0
C28	20 pF	49 005 05.2	R14	1 MΩ	49 375 47.0
C38	20 pF	49 005 05.2	R15	82000 Ω	49 375 09.0
C40	35 pF	49 057 06.0	R16	56 Ω	49 500 86.1
C47	1450 pF	49 081 32.0	R21	0,5 Ω	49 375 27.0
C49	394 pF	49 081 31.0	R22	1800 Ω	49 375 48.0
C51	70-100 pF	49 005 01.1	R31	0,1 MΩ	49 376 42.0
C61	70-100 pF	49 005 01.1	R32	33000 Ω	49 377 44.0
C72	47000 pF	49 127 61.0	R33	47000 Ω	49 377 41.0
C73	47000 pF	49 127 61.0	R34	27000 Ω	49 375 08.0
C75	25 μF	28 182 24.1	R35	47 Ω	49 376 62.0
C81	8,2 pF	49 055 15.0	R36	1,5 MΩ	49 376 48.0
C82	56 pF	49 055 25.0	R37	0,1 MΩ	49 376 62.0
C84	3300 pF	49 128 54.0	R38	1,5 MΩ	49 375 57.0
C85	1000 pF	49 126 53.0	R39	0,56 MΩ	49 375 59.0
C91	70-100 pF	49 005 01.1	R40	0,56 MΩ	49 375 37.0
C92	12000 pF	49 127 15.0	R41	12000 Ω	49 375 37.0
C93	39000 pF	49 127 21.0	R42	0,82 MΩ	49 375 37.0
C100	33 pF	49 055 22.0	R44	12000 Ω	49 375 18.0
C101	10 pF	49 055 16.0	R72	330 Ω	49 375 18.0
C102	47000 pF	49 127 61.0	R73	330 Ω	49 375 14.0
C103	47 pF	49 055 24.0	R75	150 Ω	49 377 19.0
C104	470 pF	49 055 53.0	R80	390 Ω	49 375 44.0
C105	47000 pF	49 128 61.0	R81	47000 Ω	
C106	47000 pF	49 127 61.0			
C107	47000 pF	49 128 61.0			
C108	27000 pF	49 127 19.0			
C109	100 pF	49 055 28.0			
C110	4700 pF	49 126 54.0			
C111	330 pF	49 055 05.0			
C112	22000 pF	49 129 90.0			
655A.06					
C6	11-490 pF	49 000 40.0			
C7	11-490 pF				
C8	11-490 pF				
S1, S2, S3, S4		A1 055 78.1			
S13, S14		A1 035 32.1			
S17, S18, S19, S20		A1 035 34.2			
S28, S30		A1 035 35.1			
S33, S34		A1 035 33.0			
S37, S38, S39, S40		A1 036 46.0			
S51, S52, C52		A1 035 37.3			
S61, S62, S63, C62		A1 035 38.2			
S81, S82, S83, S84		A1 080 88.0			
S91		28 587 88.0			
S92, S93		28 587 71.0			
S100		A1 000 32.0			

655 A

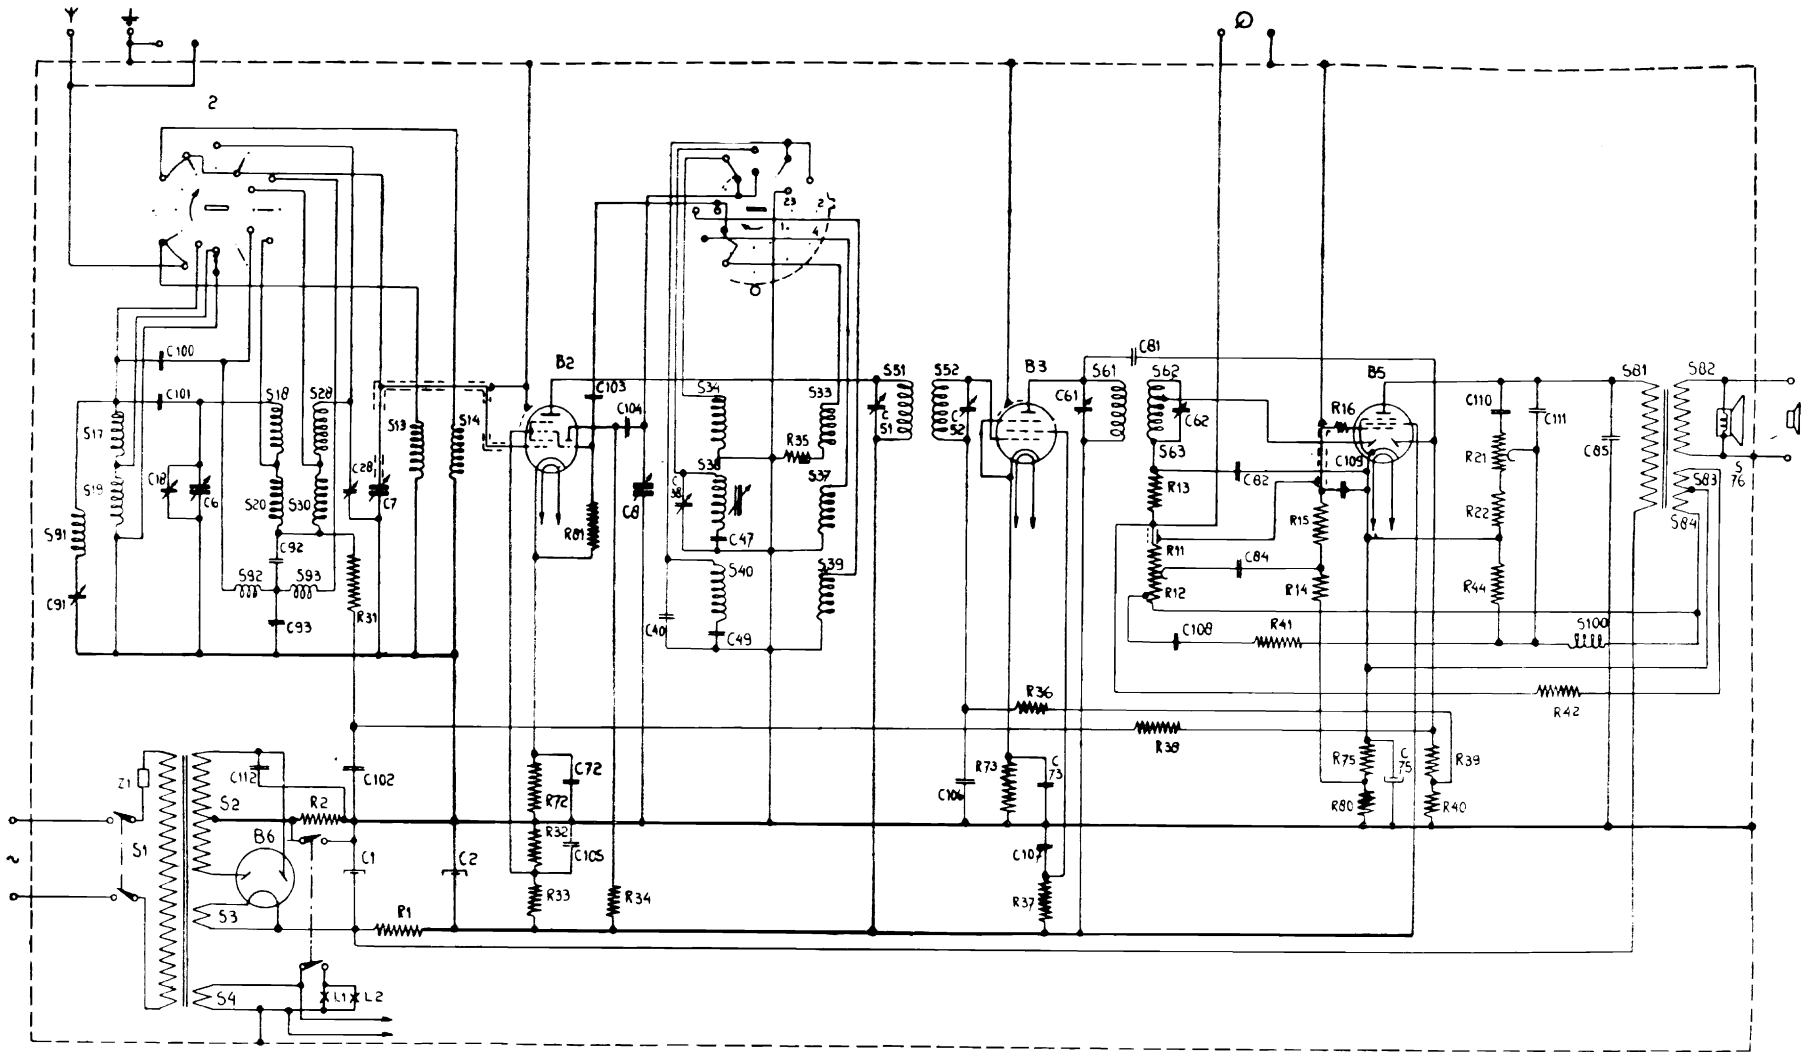

R10479

