


13,8—51 m
175—585 m
708—2000 m

9646 Z = 5 Ω


128 kc/s
A-32 118 kc/s

110 V, 125 V, 145 V,
200 V, 220 V, 245 V.
50 W.

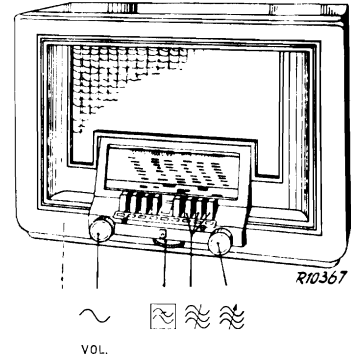

175—585 m I		708—2000 m II	
VOL. max.	C3, C4, C5 180 m	VOL. max.	C3, C4, C5 2000 m
128 kc/s-33000 pF-g1B1		128 kc/s—Y	
118 kc/s (A-32)		118 kc/s (A-32)	
C27—82 pF		Cl3 min.	
C28 max.			
C27		175—585 m III	
S24—82 pF		C3, C4, C5 + 15°	
C27 max.		VOL. max.	
S24		1600 kc/s—Y	
C23—82 pF		C18, C10, C6, C10, C18 max.	
C24 max.			
C23			
C24—82 pF			
C23 max.			
C24			

15° 2V 351 06.3

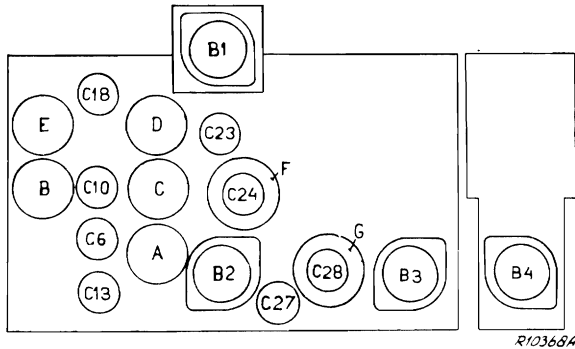

R10368A

R1	1800 Ω	48 467 10/1K8	C1	50 μF	49 029 01.0
R3	0,1 MΩ	48 426 10/100K	C2	15 μF	48 406 99/10E
R4	47000 Ω	48 426 10/47K	C3	11-490 pF	48 751 10/39K
R5	330 Ω	48 426 19/330E	C4	11-490 pF	49 000 23.1
R6	27000 Ω	48 427 10/27K	C5	11-490 pF	49 005 05.2
R7	0,1 MΩ	48 426 10/100K	C6	20 pF	48 406 99/10E
R8	47000 Ω	48 426 10/47K	C7	10 pF	48 751 10/12K
R9	0,65 MΩ	49 500 12.0	C8	12000 pF	48 751 10/39K
R9a	0,05 MΩ		C9	39000 pF	49 055 61.0
R10	1,5 MΩ	48 426 10/1M5	C10	20 pF	49 005 05.2
R11	1 MΩ	48 426 10/1M	C11	2,2 pF	48 406 10/39E
R12	150 Ω	48 426 10/150E	C12	39 pF	48 406 10/39E
R13	390 Ω	48 427 10/390E	C13	70-100 pF	49 005 06.0
R14	0,56 MΩ	48 426 10/560K	C14	47000 pF	48 426 10/47K
R15	1500 Ω	48 426 10/1K5	C15	47 pF	48 406 10/47E
R16	50000 Ω	49 500 80.1	C16	470 pF	48 406 10/470E
R17	12000 Ω	48 426 10/12K	C18	20 pF	49 005 05.2
R18	10000 Ω	48 426 10/10K	C19	33 pF	49 057 05.0
R19	0,82 MΩ	48 426 10/820K	C19 ¹⁾	35 pF	49 083 12.1
R20	47000 Ω	48 427 10/47K	C20	1450 pF	48 429 01/1K45
R21	330 Ω	48 426 10/330E	C20 ¹⁾	1615 pF	48 429 01/1K615
R22	33000 Ω	48 426 10/33K	C21	394 pF	48 429 01/394E
R23	0,56 MΩ	48 426 10/560K	C21 ¹⁾	480 pF	48 429 01/480E
R24	1,8 MΩ	49 376 63.0	C22	47000 pF	48 751 10/47K
R27	15 Ω	48 425 10/15E	C23	70-100 pF	49 005 06.0
			C24	70-100 pF	—
			C25	47000 pF	48 751 10/47K
			C26	47000 pF	48 751 10/47K
			C27	70-100 pF	49 005 06.0
			C28	70-100 pF	—
			C29	8,2 pF	48 406 99/8E2
			C30	56 pF	48 406 10/56E
			C31	3300 pF	48 751 10/33K3
			C32	25 μF	28 182 24.1
			C33	1000 pF	48 758 20/1K
			C34	4700 pF	48 758 20/4K7
			C35	33000 pF	48 751 10/33K
			C36	5600 pF	48 751 10/5K6
			C37	27000 pF	48 751 10/27K
			C39	100 pF	48 406 10/100E
			C42	47000 pF	48 751 10/47K
			C43	47000 pF	48 751 10/47K
			C50 ¹⁾	22 pF	48 406 10/22E



	B1	B2	B3	B4	
	ECH 3	EF 9	EBL 1	AZ 1	
Va	aT 135 aH 260	255	275		V
Vg2(4)	75	95	260		V
Vk	2	2,2	19		V
Ia	aT 4 aH 1	5,2	34		mA
Ig2(4)	1,5	1,6	4,6		mA

VC1 = 290 V
VC2 = 260 V


Copyright - N.V. Philips
Gloeilampfabrieken Eindhoven, Holland
Imprimé en Hollande

¹⁾ A-32
²⁾ A-25


93 950 31.

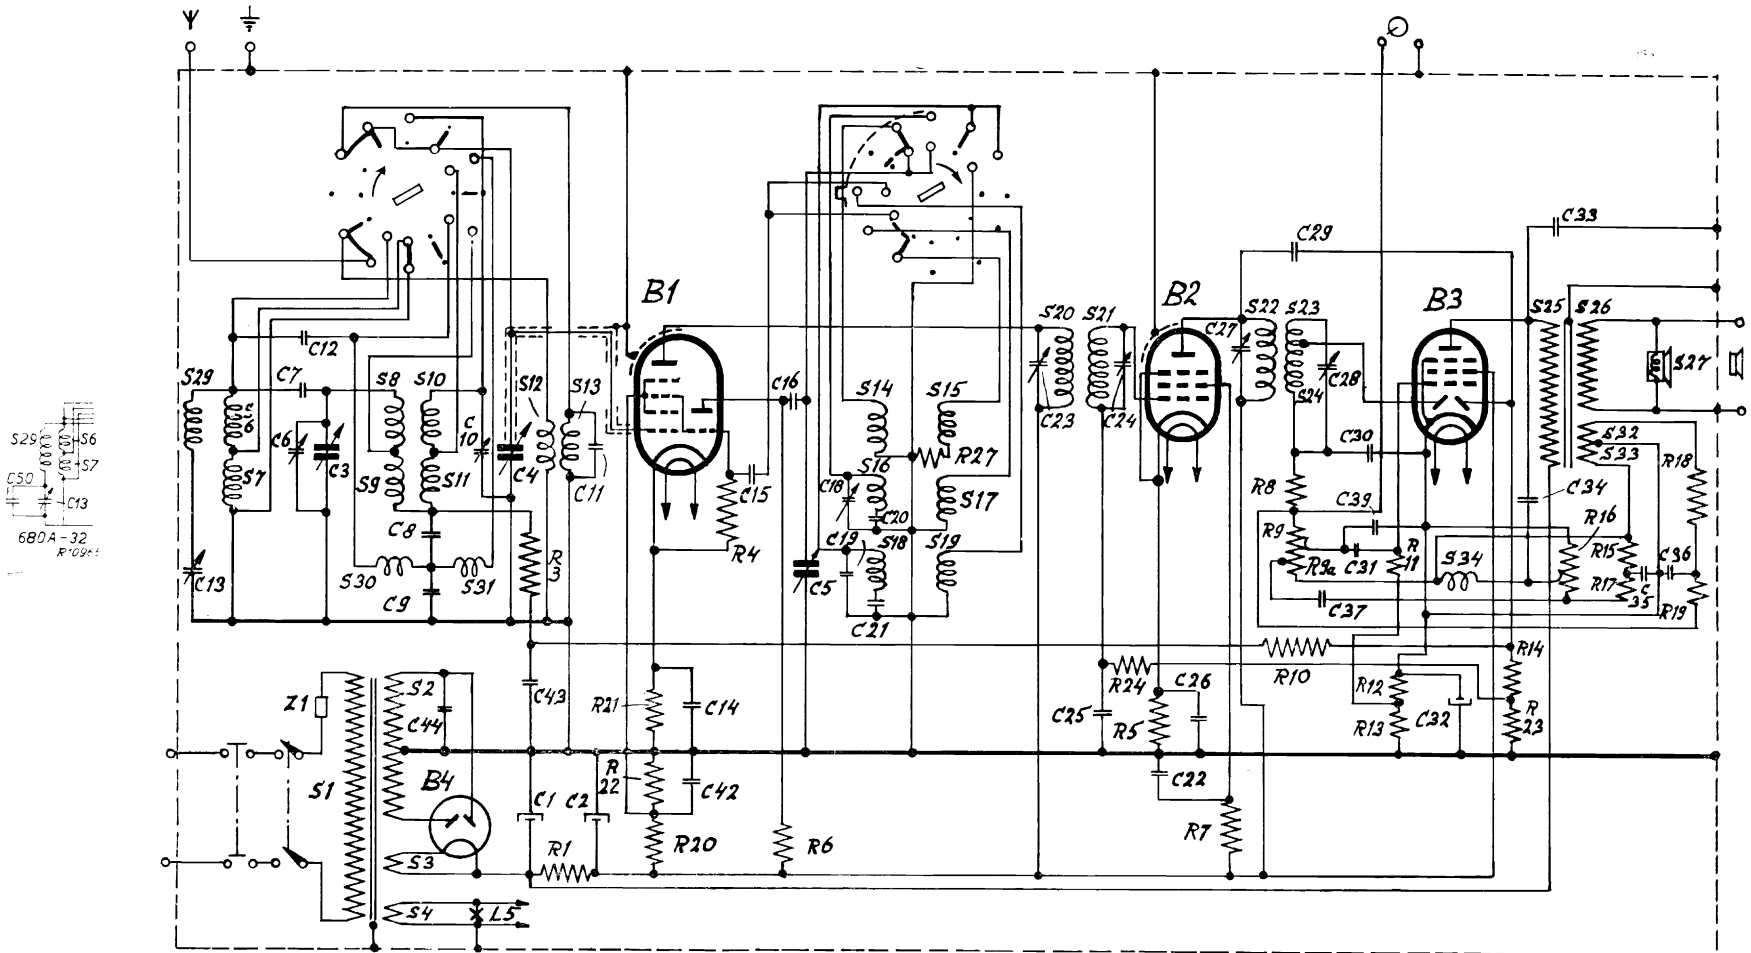


B 1



B 2




B 3



B 4




A



B




C




D



E



F



G

R10543

R10341B