

PHILIPS-SERVICE

759 A


13,5—51 m
175—570 m
750—2000 m

9636 Z = 5 Ω

127 V, 220 V

106 kc/s

60 W

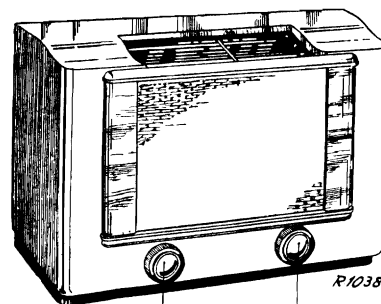

R10384

VOL ~




~



750—2000 m I	750—2000 m II	750—2000 m IV
VOL. max C5, C10, C14 min 106 kc/s—33000 pF -g1B1 S20—47000 Ω C28 max S20 S19—47000 Ω C31 max S17—47000 Ω C20 max S19, S17 S16—47000 Ω C24 max S16	VOL. max C5, C10, C14 max 106 kc/s — Y C1 min 175—570 m III C5, C10, C14 + 15° 1400 kc/s — Y C16, C9, C4 max 750—2000 m III VOL. min -25 pF—aB1 300 kc/s — Y C5, C10, C14 max VOL. max C18 max	VOL. max 1000 kc/s — Y C5, C10, C14 max (± 385 m) C49 min 175—570 m V VOL. max 1400 kc/s — Y C5, C10, C14 max 214 m

15° = 09 992 87.0

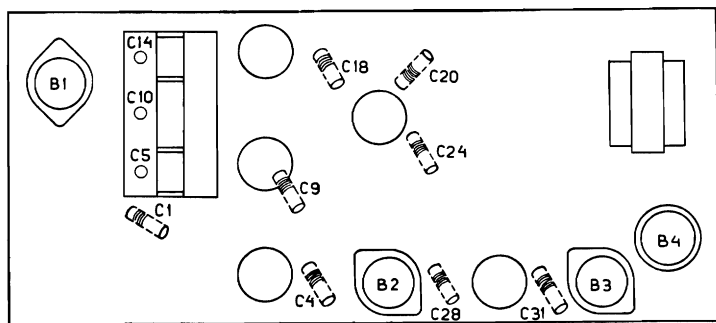

R10389

	B1	B2	B3	B4	
	ECH21	EF22	EBL21	1823	
Va	aH 235 aT 135	225	235		V
Vg2(4)	100	100	225		V
Vk	2,7	2,5	10		V
Ia	aH 2,2 aT 4,5	4	32		mA
Ig2(4)	4,7	1,5	3,2		mA

VC43 = 255 V


VC42 = 225 V

1942/43

R1	0,1 MΩ	48 551 10/100K	C1	7½-100 pF	49 005 51.2
R2	220 Ω	48 425 10/220E	C2	82 pF	48 601 10/82E
R3	47000 Ω	48 551 10/47K	C3	10 pF	48 601 99/10E
R4	22000 Ω	48 427 10/22K	C4	3½-50 pF	49 005 50.2
R5	0,82 MΩ	48 425 10/820K	C5	11-490 pF	
R6	330 Ω	48 425 10/330E	C10	11-490 pF	28 212 30.0
R7	82000 Ω	48 426 10/82K	C14	11-490 pF	
R8	1,5 MΩ	48 426 10/1M5	C6	47 pF	48 406 20/47E
R9	47000 Ω	48 551 10/47K	C7	15000 pF	48 750 10/15K
R10	0,65 MΩ	49 500 19.0	C8	39000 pF	48 750 10/39K
R10a	0,2 MΩ		C9	3½-50 pF	49 005 50.2
R11	82000 Ω	48 551 10/82K	C11	56000 pF	48 750 10/56K
R12	3300 Ω	48 425 10/3K3	C12	390 pF	48 601 10/390E
R13	0,1 MΩ	48 551 10/100K	C13	56 pF	48 601 10/56E
R14	1,5 MΩ	48 426 10/1M5	C15	56000 pF	48 751 10/56K
R15	150 Ω	48 426 10/150E	C16	3½-50 pF	49 005 50.2
R16	150 Ω	48 426 10/150E	C17	2010 pF	48 429 01/2K01
R17	1500 Ω	48 467 10/1K5	C18	7½-100 pF	49 005 51.2
R18	0,82 MΩ	48 426 10/820K	C19	725 pF	48 429 01/725E
R19	10000 Ω	48 551 10/10K	C20	7½-100 pF	49 005 51.2
R20	1,5 MΩ	48 426 10/1M5	C21	100 pF	
R21	27000 Ω	48 427 10/27K	C22	1000 pF	48 752 20/1K
R22	6800 Ω	48 425 10/6K8	C23	100 pF	
R23	0,56 MΩ	48 425 10/560K	C24	7½-100 pF	49 005 51.2
R24	22000 Ω	48 425 10/22K	C25	27000 pF	48 750 10/27K
			C26	56000 pF	48 750 10/56K
			C27	56000 pF	48 751 10/56K
			C28	7½-100 pF	49 005 51.2
			C29	100 pF	
			C30	100 pF	
			C31	7½-100 pF	49 005 51.2
			C32	2 pF	28 205 88.0*
			C33	100 pF	48 601 05/100E
			C34	2200 pF	48 751 10/2K2
			C35	10000 pF	48 750 10/10K
			C36	56000 pF	48 750 10/56K
			C37	50 μF	48 313 02/50
			C38	5600 pF	48 750 10/5K6
			C39	2200 pF	48 752 10/2K2
			C40	56000 pF	48 750 10/56K
			C41	56000 pF	48 751 10/56K
			C42	50 μF	48 317 09/50 +
			C43	50 μF	50
			C44	100 pF	48 601 05/100E
			C45	10 pF	48 601 99/10E
			C46	220 pF	48 601 10/220E
			C47	2,5 pF	28 206 62.0
			C48	390 pF	48 601 10/390E
			C49	7½-100 pF	49 005 51.2

S1
S2, S3, S4, S5
S6, S7, S8, S9, S30
S10
S10, S11, S12
S13, S14, S15
S16, S17, S18
C21, C23
S19, S20, S20a
C29, C30
S21, S22, S23, S24
S25
S26, S27, S28, S29
S31

GK562 58.0
GK562 01.0
GK562 80.0
GK562 76.0
GK562 77.0
GK562 79.0
GK512 00.0
28 220 51.1
GK512 02.0
GK562 63.0

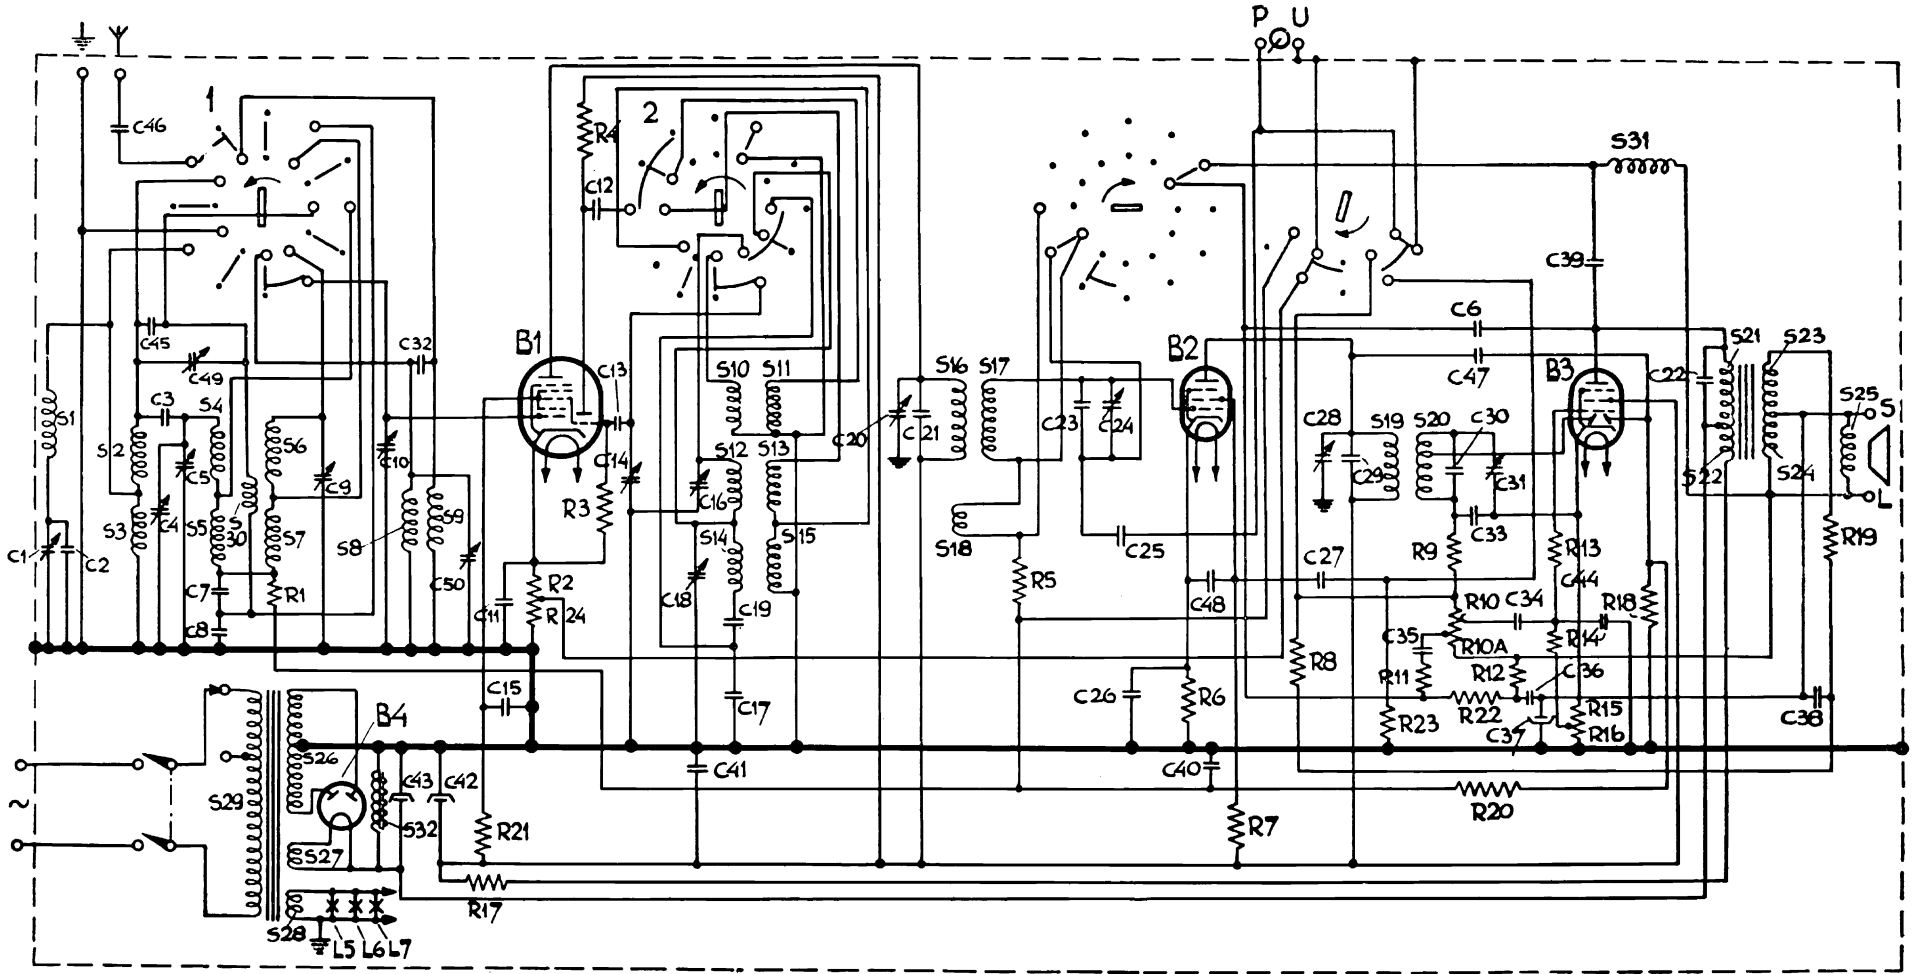

R12654



ECH 21

EF 22

EBL 21

1823

R10385