

PHILIPS SERVICE

789 A

13,8—51 m
186—585 m
708—2000 m


128 kc/s
A-32 118 kc/s

9682
9636

Z = 5 Ω


110 V, 125 V, 145 V, 200 V,
220 V, 245 V.

50 W

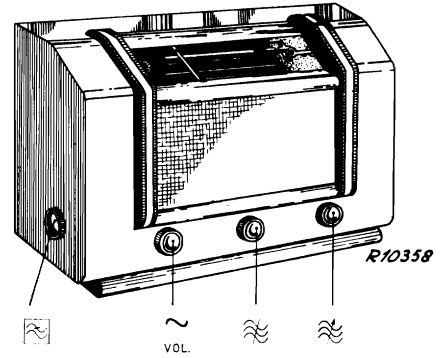

13,8—51 m	186—585 m	708—2000 m	708—2000 m
C6, C7, C8 min. max. C106 128 kc/s—33.000 pF-g1B2 118 kc/s (A-32) C52, C61—82 pF C62, C51 max. C52, C61 C51, C62—82 pF C61, C52 max. C51, C62 C106	C6, C7, C8 max. VOL. Max 128 kc/s— 118 kc/s (A-32) C91 min. 186—585 m VOL. Max C6, C7, C8 + 15° 1600 kc/s— C38, C28, C18 max. 25 pF—aB2 C8 550 kc/s— C6, C7, C8 max. C8 C48 max.	VOL. Max C6, C7, C8 + 15° 400 kc/s— C40 max. : 25 pF—aB2 C8 160 kc/s— C6, C7, C8 1875 m C8 C50 max. 186—585 m 857 kc/s— VOL. Max C6, C7, C8 350 m 350 m	

15° 09 992 44.0

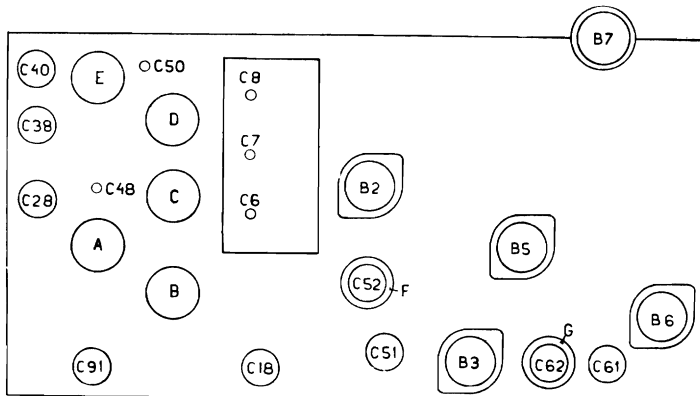

R10934

	B2	B3	B5	B6	B7	
	ECH 3	ECH 4	EBL 1	AZ 1	EM 1	
Va	aT 100 aH 200	aT 65 aH 210	235		40	V
Vg2(4)	65	70	220		200	V
Vk	1.9	1.9	9		9	V
Ia	aT 3.1 aH 1.0	aT 1.5 aH 4.5	35		0,07	mA
Ig2(4)	1,5	3,0	4		0,1	mA

VCI = 250 V


VC2 = 220 V

Copyright - N.V. Philips
Gloeilampenfabrieken Eindhoven, Holland
Imprimé en Hollande

R1	1800 Ω	48 467 10/1K8	C1	45 μF	49 032 01.0
R2	18 Ω	48 425 10/18E	C2	32 μF	28 182 40.0
R11	0.65 MΩ	49 500 19.0	C6	11-490 pF	28 212 30.0
R12	0.2 MΩ		C7	11-490 pF	
R21	0.2 MΩ	49 470 36.0	C8	11-490 pF	
R22	0.65 MΩ		C18	20 pF	49 005 05.2
R31	0.1 MΩ	48 425 10/100K	C28	20 pF	49 005 05.2
R32	1 MΩ	48 426 10/1M	C34	1.5 pF	49 055 60.0
R33	47000 Ω	48 427 10/47K	C38	20 pF	49 005 05.2
R34	27000 Ω	48 427 10/27K	C40	20 pF	49 005 05.2
R35	47 Ω	48 425 10/47E	C47	1360 pF	48 429 02/1K36
R36	1 MΩ	48 426 10/1M	C47 ¹⁾	400 pF	48 406 02/400E
R37	47000 Ω	48 427 10/47K	C48	200 pF	49 057 31.0
R38	1.5 MΩ	48 426 10/1M5	C49	350 pF	28 212 08.2
R39	1.5 MΩ	48 426 10/1M5	C49 ¹⁾	350 pF	48 429 02/350E
R40	0.47 MΩ	48 425 10/470K	C50	200 pF	48 406 10/350E
R41	0.56 MΩ	48 425 10/560K	C51	70-100 pF	28 212 08.2
R42	0.18 MΩ	48 425 10/180K	C52	70-100 pF	49 005 01.1
R43	0.1 MΩ	48 426 10/100K	C61	70-100 pF	—
R44	22000 Ω	48 425 10/22K	C62	70-100 pF	49 005 01.1
R45	0.27 MΩ	48 425 10/270K	C72	47000 pF	—
R46	1.5 MΩ	48 426 10/1M5	C73	25 μF	48 750 10/47K
R47	0.27 MΩ	48 425 10/270K	C75	100 μF	28 182 24.1
R50	3900 Ω	48 425 10/39K9	C81	15 pF	28 185 68.1
R51	56000 Ω	48 425 10/56K	C82	56 pF	48 406 10/15E
R52	10000 Ω	48 425 10/10K	C84	0.12 μF	48 406 10/56E
R53	1 MΩ	48 426 10/1M	C85	2200 pF	48 750 10/120K
R54	2.2 MΩ	48 427 10/2M2	C91	70-100 pF	48 758 20/2K2
R55	0.1 MΩ	48 425 10/100K	C92	12000 pF	49 005 01.1
R56	0.1 MΩ	48 425 10/100K	C93	39000 pF	48 750 10/12K
R57	1000 Ω	48 425 10/1K	C100	33 pF	48 406 10/39K
R58	33000 Ω	48 426 10/33K	C101	10 pF	48 406 10/33E
R59	0.47 MΩ	48 425 10/470K	C102	22 pF	48 406 99/10E
R72	330 Ω	48 425 10/330E	C103	47 pF	48 406 10/22E
R73	220 Ω	48 425 10/220E	C104	47 pF	48 406 10/47E
R75	150 Ω	48 426 10/150E	C104	470 pF	48 406 20/470E
R81	47000 Ω	48 425 10/47K	C105	47000 pF	48 751 20/47K
			C106	47000 pF	48 750 10/47K
			C107	47000 pF	48 751 20/47K
			C108	8200 pF	48 750 10/8K2
			C109	0.18 μF	48 751 10/180K
			C110	47000 pF	48 750 20/47K
			C111	56000 pF	48 751 10/56K
			C112	22000 pF	48 756 20/22K
			C113	0.1 μF	48 750 20/100K
			C114	39 pF	49 055 06.3
			C115	39000 pF	48 750 10/39K
			C116	5600 pF	48 750 10/56K
			C117	0.22 μF	48 750 20/220K
			C118	180 pF	48 406 10/180E
			C91a ¹⁾	22 pF	48 406 10/22E
Z1	600 mA	03 140 43			

¹⁾ A-32

93 950 27.2

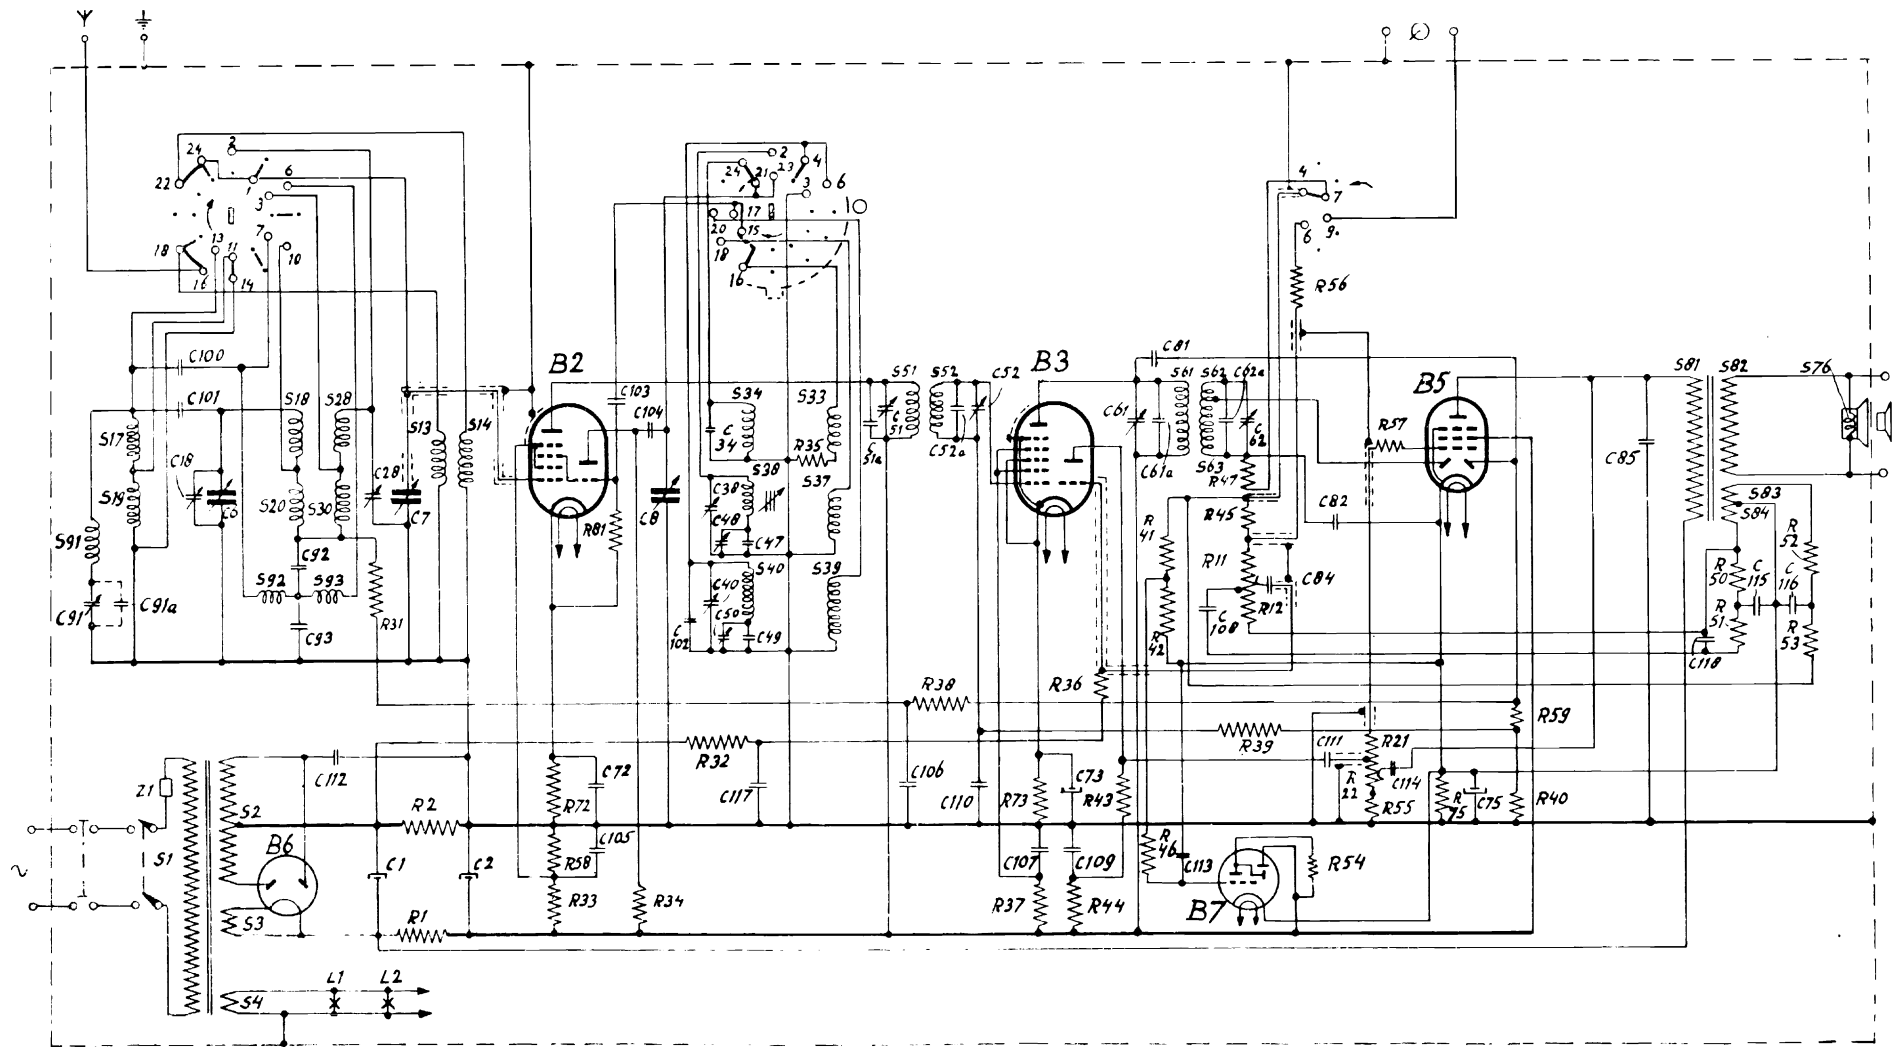

R10867

