


PHILIPS-SERVICE

789X


13,8—51 m
186—585 m
708—2000 m
128 kc/s

9682
9636
Z = 5 Ω
110 V, 125 V, 145 V, 200 V,
220 V, 245 V
50 W

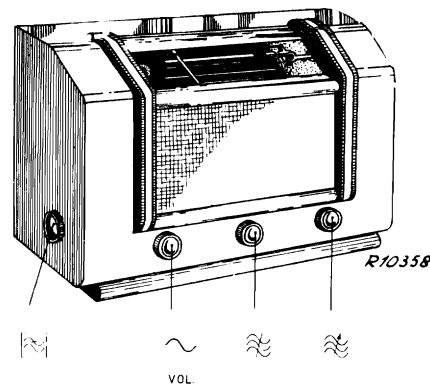

186—585 m I	708—2000 m II	708—2000 m III
C6, C7, C8 min	C6, C7, C8 max	VOL. max
max	max	C6, C7, C8 + 15
C106	128 kc/s—	400 kc/s—
128 kc/s—33.000 pF-g1B2	C91 min	C40 max
C52, C61—82 pF	186—585 m III	25 pF—aB2
C62, C51 max	VOL. max	C8
C52, C61	C6, C7, C8 + 15°	160 kc/s—
C51, C62—82 pF	1600 kc/s—	C6, C7, C8 1875 m
C61, C52 max	C38, C28, C18 max	C8
C51, C62	25 pF—aB2	C50 max
C106	C8	186—585 m V
	550 kc/s—	857 kc/s—
	C6, C7, C8 max	VOL. max
	C8	C6, C7, C8 350 m
	C48 max	350 m

15° A9 600 13.0

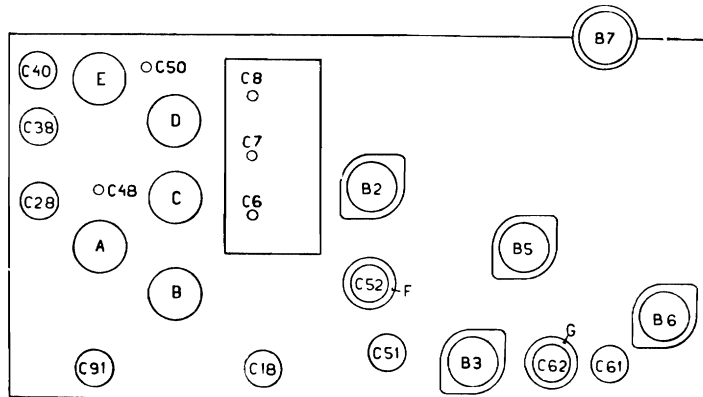

R10934

	B2	B3	B5	B6	B7	
	ECH3	ECH4	EBL1	AZ1	EM1	
Va	aT 100 aH 200	aT 65 aH 210	235		40	V
Vg2(4)	65	70	220		200	V
Vk	1,9	1,9	9		9	V
Ia	aT 3,1 aH 1,0	aT 1,5 aH 4,5	35		0,07	mA
Ig2(4)	1,5	3,0	4		0,1	mA

VC1 = 250 V
VC2 = 220 V


Copyright
N.V. Philips' Gloeilampenfabrieken, Eindhoven
Imprimé en Hollande

1941/42

R1	1800 Ω	48 467 10/1K8	C1	50 μF	48 312 09/50
R2	18 Ω	48 425 10/18E	C2	25 μF	48 312 09/25
R11	0,65 MΩ	49 501 07.0	C6	11-490 pF	49 005 05.2
R12	0,2 MΩ		C7	11-490 pF	49 005 05.2
R21	0,2 MΩ		C8	11-490 pF	28 212 30.0
R22	0,65 MΩ	49 473 00.0	C18	2½-20 pF	49 005 05.2
R31	0,1 MΩ	48 551 10/100K	C28	2½-20 pF	49 005 05.2
R32	1 MΩ	48 426 10/1M	C34	1,5 pF	49 055 60.0
R33	47000 Ω	48 427 10/47K	C38	2½-20 pF	49 005 05.2
R34	27000 Ω	48 427 10/27K	C40	2½-20 pF	49 005 05.2
R35	47 Ω	48 425 10/47E	C47	1360 pF	48 429 02/1K36
R36	1 MΩ	48 426 10/1M	C48	20-275 pF	49 005 53.2
R37	47000 Ω	48 427 10/47K	C49	350 pF	48 429 02/350E
R38	1,5 MΩ	48 426 10/1M5	C50	20-275 pF	49 005 53.2
R39	1,5 MΩ	48 426 10/1M5	C51	0-30 pF	28 212 36.4
R40	0,47 MΩ	48 551 10/470K	C52	70-100 pF	—
R41	0,56 MΩ	48 425 10/560K	C61	0-30 pF	28 212 36.4
R42	0,18 MΩ	48 425 10/180K	C62	70-100 pF	—
R43	0,1 MΩ	48 552 10/100K	C72	47000 pF	48 750 10/47K
R44	22000 Ω	48 425 10/22K	C73	25 μF	28 182 24.1
R45	0,27 MΩ	48 425 10/270K	C75	100 μF	48 313 52/100
R46	1,5 MΩ	48 426 10/1M5	C81	15 pF	48 601 10/15E
R47	0,27 MΩ	48 425 10/270K	C82	56 pF	48 601 10/56E
R50	3900 Ω	48 425 10/3K9	C84	0,12 μF	48 750 10/120K
R51	56000 Ω	48 425 10/56K	C85	2200 pF	48 752 20/2K2
R52	10000 Ω	48 551 10/10K	C91	0-30 pF	28 212 36.4
R53	1 MΩ	48 426 10/1M	C92	12000 pF	48 750 10/12K
R54	2,2 MΩ	48 427 10/2M2	C93	39000 pF	48 750 10/39K
R55	0,1 MΩ	48 551 10/100K	C100	33 pF	48 601 10/33E
R56	0,1 MΩ	48 551 10/100K	C101	10 pF	48 601 99/10E
R57	1000 Ω	48 551 10/1K	C102	22 pF	48 601 10/22E
R58	33000 Ω	48 426 10/33K	C103	47 pF	48 601 10/47E
R59	0,47 MΩ	48 551 10/470K	C104	470 pF	48 601 20/470E
R72	330 Ω	48 425 10/330E	C105	47000 pF	48 751 20/47K
R73	220 Ω	48 425 10/220E	C106	47000 pF	48 750 10/47K
R75	150 Ω	48 426 10/150E	C107	47000 pF	48 751 20/47K
R81	47000 Ω	48 551 10/47K	C108	8200 pF	48 750 10/8K2
			C109	0,18 μF	48 751 10/180K
			C110	47000 pF	48 750 20/47K
			C111	56000 pF	48 751 10/56K
			C112	22000 pF	48 758 20/22K
			C113	0,1 μF	48 750 20/100K
			C114	1000 pF	48 750 20/1K
			C115	39000 pF	48 751 10/39K
			C116	5600 pF	48 750 10/56K
			C117	0,22 μF	48 750 20/220K
			C118	180 pF	48 601 10/180E
			C134	10000 pF	48 750 20/10K

S1, S2, S3, S4	A1 056 84.1	S51, S52, C52	A1 035 37.3
S13, S14	A1 035 32.1*	S61, S62, S63, C62	A1 035 38.2
S17, S18, S19, S20	A1 035 34.2	S76	28 220 51.1
S28, S30	A1 035 35.1	S81, S82, S83	A1 081 91.0
S33, S34	A1 035 33.0	S84, S85	28 587 88.0
S37, S38, S39, S40	A1 036 46.0*	S91	28 587 71.0
		S92, S93	

93 952 97.1

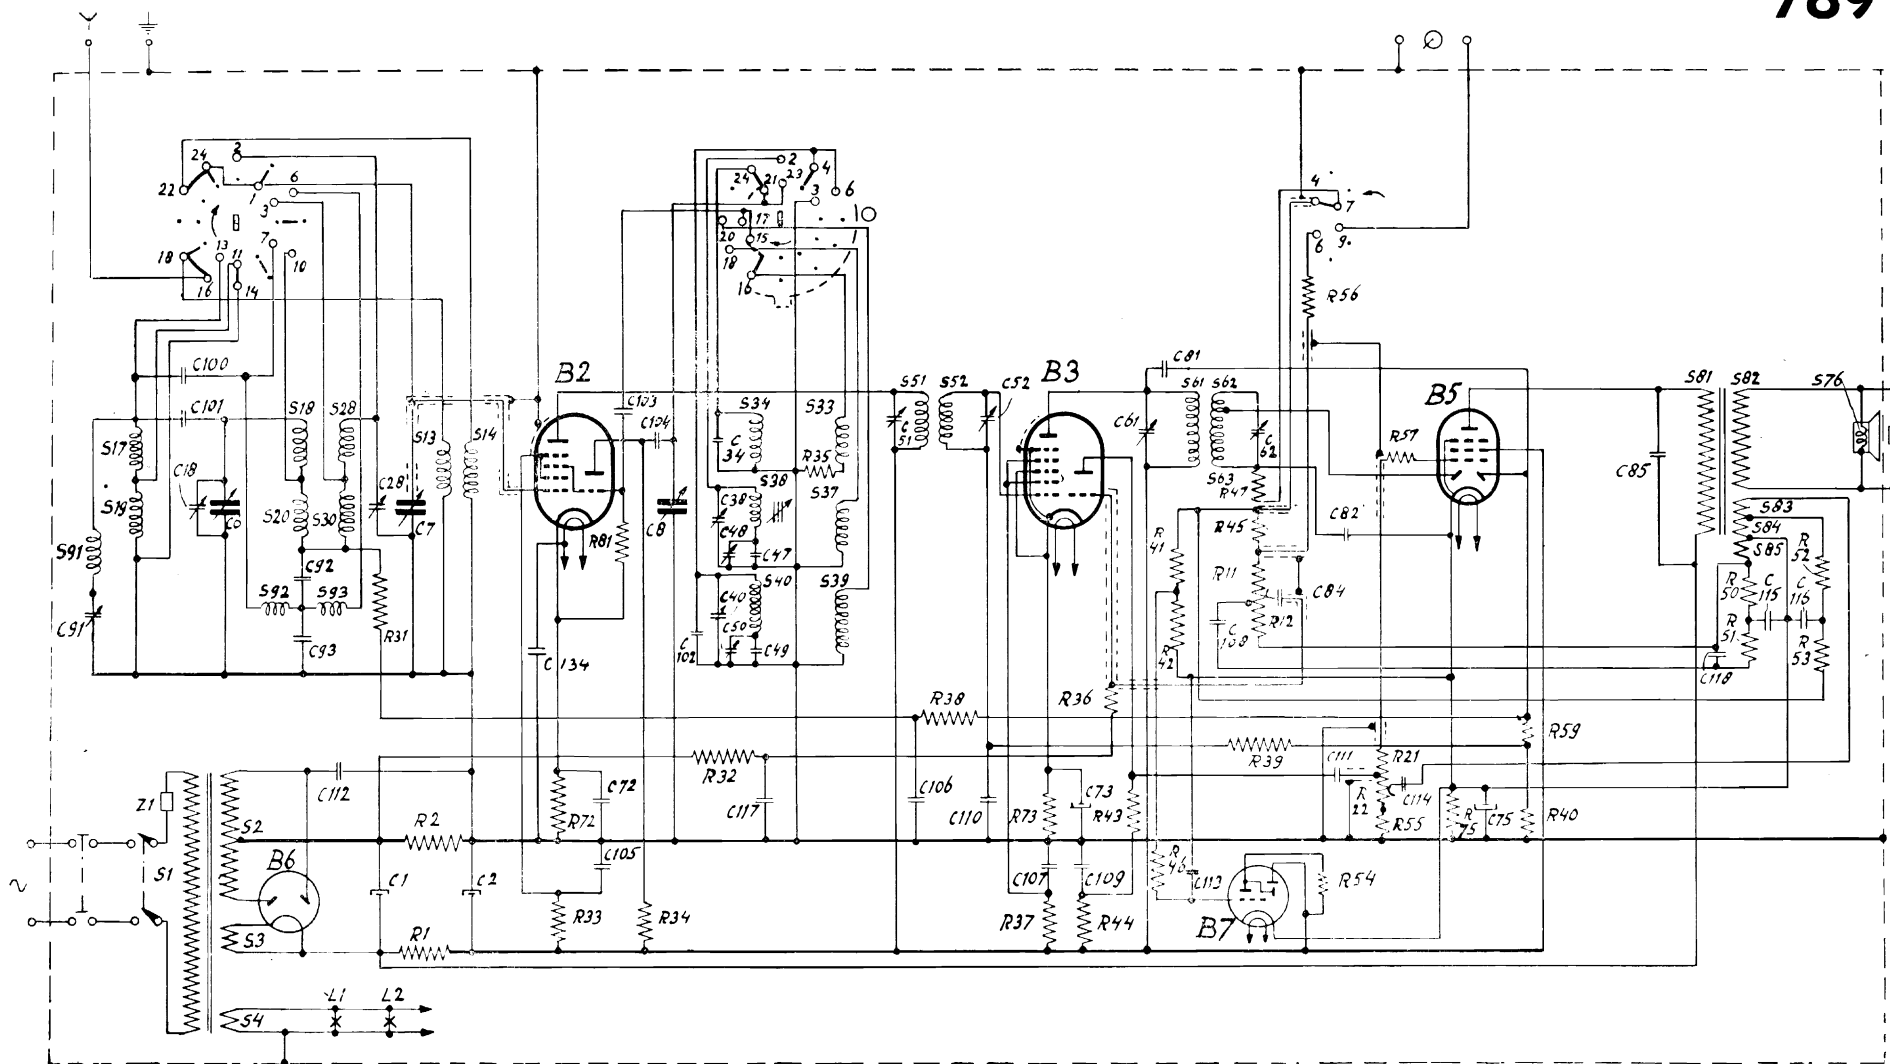

R12684

