


PHILIPS-SERVICE

824 A

200—600 m
800—2000 m

103—253 V



44 W



VOL.

200—600 m	200—600 m	800—2000 m
VOL. max. 225 m—200 pF— C13, C15 225 m C16 max.	VOL. max. 225 m—200 pF— C13, C15 225 m 225 m	VOL. max. C13, C15 1000 m 1000 m—200 pF— C22 max.

R1	1200 Ω	—	C1	15 μF	—
R2	39000 Ω	48 427 10/39K	C2	15 μF	—
R3	68000 Ω	48 427 10/68K	C3	1 μF	—
R5	27000 Ω	48 427 10/27K	C4	0,25 μF	—
R6	0,1 MΩ	48 426 10/100K	C6	0,25 μF	25 115 30.1
R7	0,39 MΩ	48 426 10/390K	C8	0,25 μF	—
R8	2,2 MΩ	48 426 10/2M2	C9	0,1 μF	—
R9	0,68 MΩ	48 426 10/680K	C10	0,5 μF	—
R10	680 Ω	48 427 10/680E	C5	0,1 μF	48 751 10/100K
R11	18000 Ω	48 427 10/18K	C7	0,1 μF	48 751 10/100K
R12	0,33 MΩ	48 427 10/330K	C11	100 pF	48 429 10/100E
R13	2,2 MΩ	48 426 10/2M2	C12	20 pF	48 429 10/20E
R14	0,33 MΩ	48 426 10/330K	C13	430 pF	25 828 85.0*
R15	390 Ω	48 427 10/390E	C15	430 pF	—
R17	68000 Ω	48 426 10/68K	C14	30 pF	28 212 36.4
R18	330 Ω	48 427 10/330E	C16	30 pF	28 212 36.4
R19	0,68 MΩ	48 426 10/680K	C17	640 pF	48 429 10/640E
			C18	250 pF	48 429 10/250E
			C19	2200 pF	48 752 10/2K2
			C20	50 pF	48 429 10/50E
			C21	4700 pF	48 751 10/4K7
			C22	27 pF	28 212 36.4

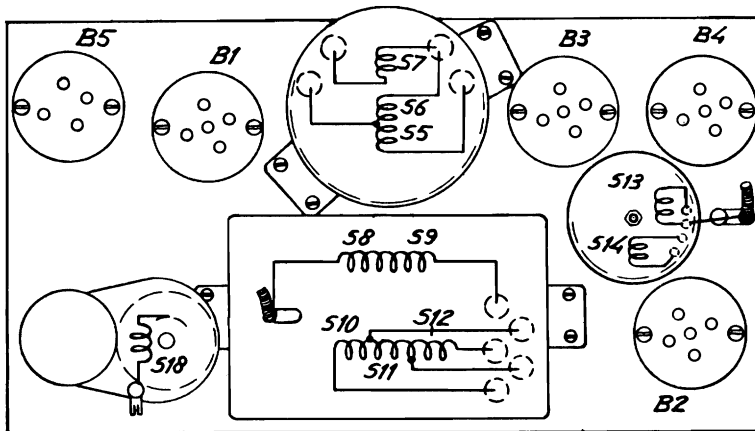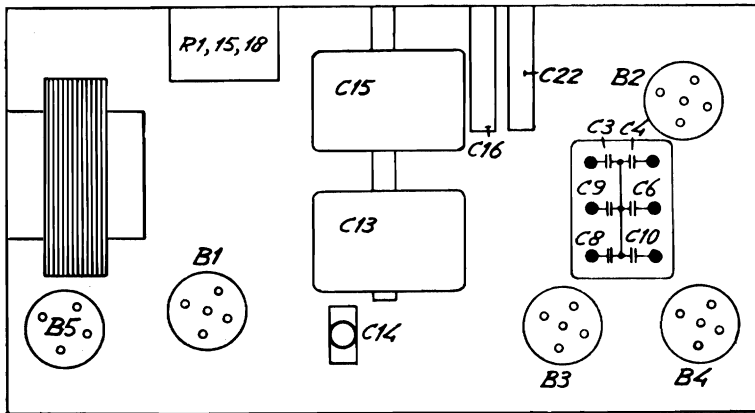

R11383

	B1	B2	B3	B4	B5	
	E 455	E 462	E 499	C 453	1823	
V _a	225	225	168	215	—	V
V _{g2}	80	115	—	225	—	V
I _a	1,9	2,8	0,12	20	—	mA


S1, S2, S3, S4	—
S5, S6, S7	25 960 10.0*
S8, S9, S10, S11, S12	25 960 11.0*
S13, S14	25 728 26.1*
S18	25 960 78.0*

VC2 = 225 V.

Copyright
N.V. Philips Gloeilampenfabriekes,
Eindhoven
Imprimé en Hollande

93 951 24

S:	5,6,7	8,9,12,10,11	13,14	1	2,3,4	18
C:	13,7,11	12,14	5,22,16,9,15	4	17	10,18,6,1,19,8,20,2,3,21
R:	3,5,2		10	17	11	7,6,12,11,13,8,9,14,15,18,19

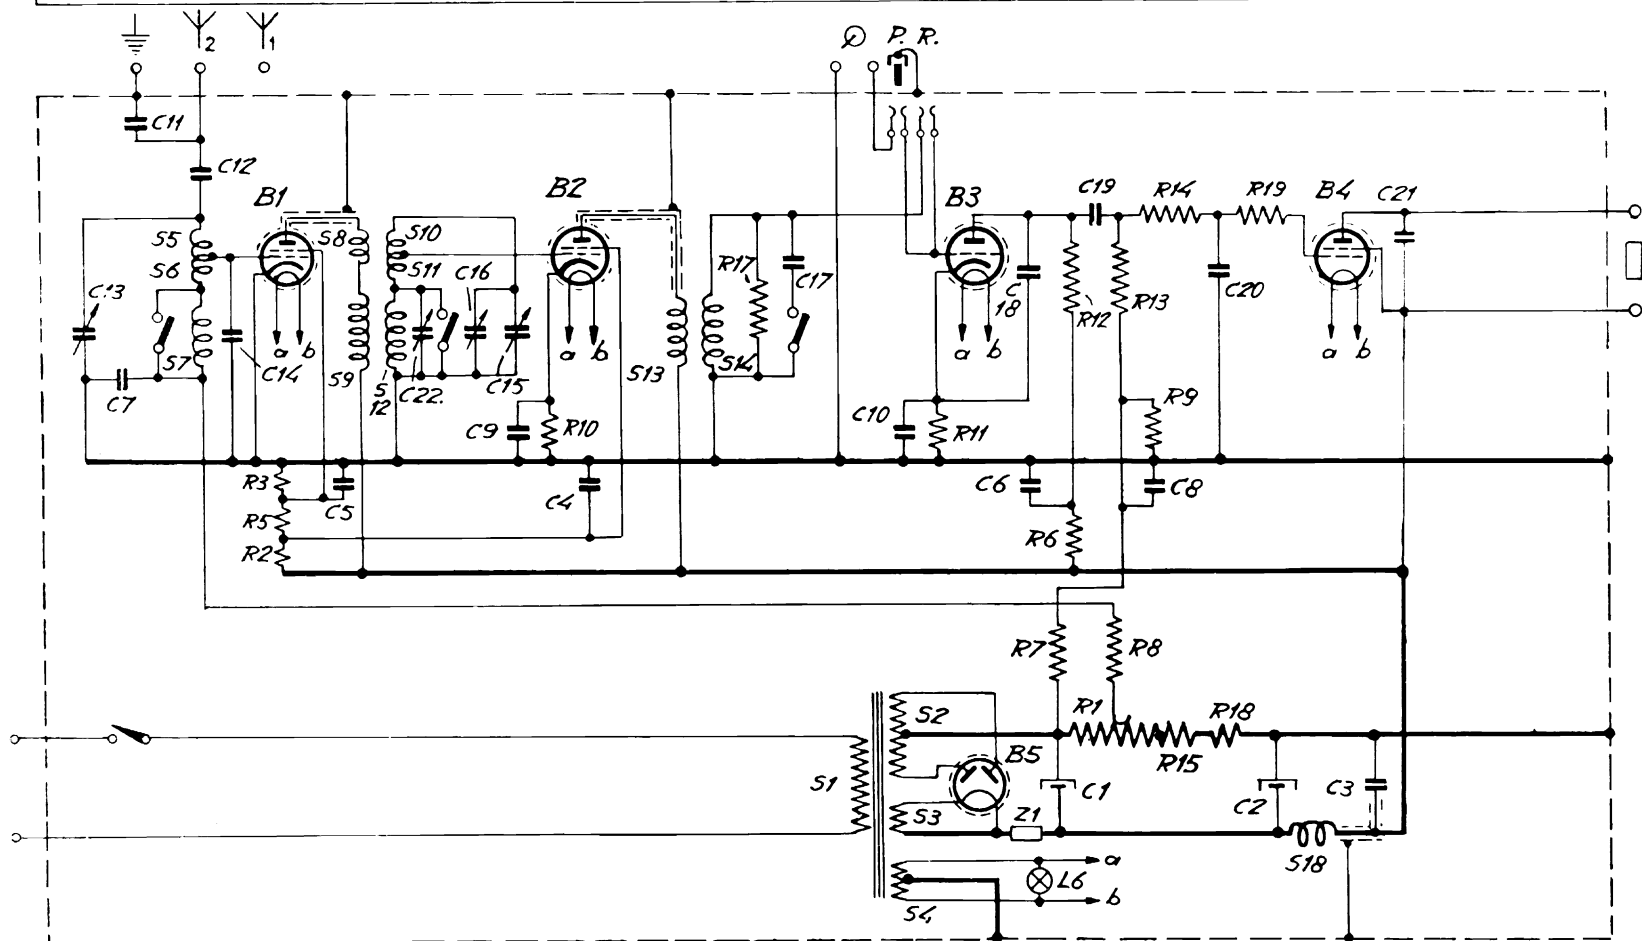

R11364

