


PHILIPS-SERVICE

847 A


13,5-51 m
180-580 m
750-2000 m

9636 R-37
110 V, 125 V, 145 V
200 V, 225 V, 245 V
60 watt

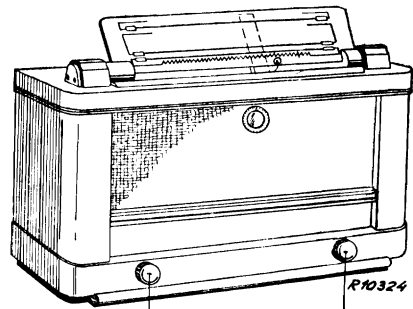

~ VOL.

	750-2000 m		750-2000 m
	C5, C10, C14 min.		C31 max.
	106 kHz-33000 pF-g1B1		S17-50 000 Ω
	S20-50000 Ω		C20 max.
	C28 max.		S19, S17
	S20		S16-50 000 Ω
	S19-50 000 Ω		C24 max.
	13,5-51 m		180-580 m
	14 MHz-		C5, C10, C14 + 15°
	C5, C10, C14 14 MHz		1525 kHz-
	C50 max.		C16, C9, C4 max.
	C5, C10, C14 14 MHz		-25 pF-aB1
	C50 max.		300 kHz-
			C5, C10, C14 300 kHz
			C18 max.

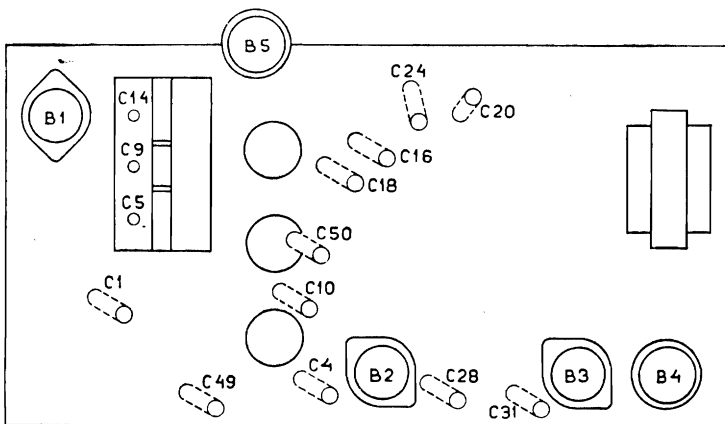

R10356

	B1	B2	B3	B4	B5
	ECH 21	EF 22	EBL 21	1823	EM 4
Va	aH 235 aT 135	235	255		45 45
Vg2 (3-5)	100	100	225		235
Vk	2,7	2,5	10		10
Ia	aH 2,2 aT 4,5	5,6	32		0,2 0,1
Ig2 (3-5)	4,7	1,5	3,2		2,1

C1	30 pF	28 212 06.0	R1	0,1 MΩ	49 375 48.0
C2	82 pF	49 055 27.0	R2	220 Ω	49 375 16.0
C3	10 pF	49 055 16.0	R3	47000 Ω	49 375 44.0
C4	20 pF	28 212 18.0	R4	22000 Ω	49 377 40.0
C5			R5	0,82 MΩ	49 375 59.0
C10	11-490 pF	28 212 30.0	R6	330 Ω	49 375 18.0
C14			R7	82000 Ω	49 376 47.0
C6	47 pF	49 055 24.0	R8	1,5 MΩ	49 376 47.0
C7	15000 pF	49 127 16.0	R9	47000 Ω	49 375 44.0
C8	39000 pF	49 127 21.0	R10	0,65 MΩ	49 500 19.0
C9	20 pF	28 212 18.0	R10a	0,2 MΩ	49 500 19.0
C11	56000 pF	49 127 23.0	R11	82000 Ω	49 375 47.0
C12	390 pF	49 055 35.0	R12	3300 Ω	49 375 30.0
C13	56 pF	49 055 25.0	R13	0,1 MΩ	49 375 48.0
C15	56000 pF	49 128 23.0	R14	1,5 MΩ	49 376 62.0
C16	20 pF	28 212 18.0	R15	150 Ω	49 376 14.0
C17	2010 pF	28 193 01.0	R16	150 Ω	49 376 14.0
C18	30 pF	28 212 06.0	R17	1500 Ω	49 356 29.0
C19	725 pF	28 195 57.0	R18	0,82 MΩ	49 375 59.0
C20	30 pF	28 212 06.0	R19	10000 Ω	49 375 36.0
C21	100 pF	28 212 06.0	R20	1,5 MΩ	49 376 62.0
C22A19	2200 pF	49 129 06.0	R21	27000 Ω	49 377 41.0
C22	1000 pF	49 129 51.0	R22	6800 Ω	49 375 34.0
C23	100 pF		R23	0,56 MΩ	49 375 57.0
C24	30 pF	28 212 06.0	R24	22000 Ω	49 375 40.0
C25	27000 pF	49 127 19.0	R25	1 MΩ	49 376 60.0
C26	56000 pF	49 127 23.0	R26	1,5 MΩ	49 376 62.0
C27	56000 pF	49 128 23.0	R27	1 MΩ	49 376 60.0
C28	30 pF	28 212 06.0			
C29	100 pF				
C30	100 pF				
C31	30 pF	28 212 06.0			
C32	2 pF	28 205 88.0			
C33	100 pF	49 057 85.0			
C34	2200 pF	49 128 06.0			
C35	10000 pF	49 127 14.0			
C36	56000 pF	49 127 23.0			
C37	50 μF	49 020 01.0			
C38	5600 pF	49 127 11.0			
C39A19	1000 pF	49 129 51.0			
C39	2200 pF	49 129 06.0			
C40	56000 pF	49 127 23.0			
C41	56000 pF	49 128 23.0			
C42	14 μF	49 029 01.0			
C43	47 μF	49 057 85.0			
C44	100 pF	49 057 85.0			
C45	10 pF	49 055 16.0			
C46	220 pF	49 055 32.0			
C47	2,5 pF	28 206 62.0			
C48	390 pF	49 055 35.0			
C49	30 pF	28 212 06.0			
C50	12 pF	28 212 05.0			
C51	27000 pF	49 127 19.0			
S1		GK 562 58.0	S19, S20, S20a		GK 562 79.0
S2, S3, S4, S5		GK 563 06.0	C29, C30		GK 512 00.0
S6, S7, S8, S9, S30		GK 563 07.0	S21-S24		GK 512 26.0
S10, S11, S12, S13, S14, S15		GK 563 05.0	S21-S24 (A19)		28 220 51.0
S16, S17, S18		GK 562 77.0	S25		GK 512 22.0
C21, C23			S26, S27, S28, S29		GK 562 63.0
			S31		A1 001 62.1
			S32		

