

PHILIPS SERVICE

870 A


200—600 m
850—2000 m

2157

103—253 V

45 W.

VOL. GRAM.


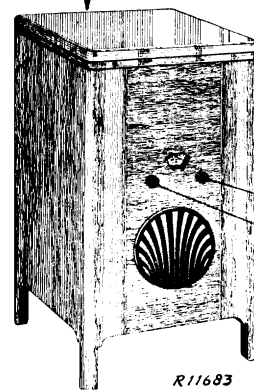


VOL.


R11683

200—600 m III		200—600 m V		850—2000 m III	
VOL.	max.	VOL.	max.	VOL.	max.
	225 m—200 pF—		225 m—200 pF—		1000 m—200 pF—
	C10, C11 225 m.		C10, C11 225 m		C10, C11 1000 m
	C13 max.		225 m		C15 max.

R1	47000 Ω	48 427 10/47K	C1	3 μF	
R2	0,1 MΩ	48 427 10/100K	C2	2,5 μF	
R3	8200 Ω	48 426 10/8K2	C5	1 μF	25 114 06.0
R4	13000 Ω	48 427 10/1K8	C7	0,5 μF	
R6	820 Ω	25 718 90.0	C9	0,5 μF	
R7	47 Ω	48 426 10/47E	C21	0,1 μF	
R8	0,1 MΩ	48 425 10/100K	C3	0,5 μF	
R9	0,22 MΩ	48 425 10/220K	C4	0,5 μF	25 114 07.0
R10	680 Ω	48 427 10/680E	C8	0,5 μF	
R11	1 MΩ	48 425 10/1M	C10	430 pF	25 828 27.0*
R13	0,22 MΩ	48 425 10/220K	C11	430 pF	
R14	50000 Ω	49 500 20 0	C12	20 pF	49 005 05.2
R15	56000 Ω	48 425 10/56K	C13	30 pF	28 212 36.4
			C14	30 pF	28 212 36.4
			C15	30 pF	28 212 36.4
			C16	20 pF	48 429 10/20E
			C17	640 pF	48 429 10/640E
			C18	800 pF	48 429 10/800E
			C20	8200 pF	48 751 10/8K2
			C21	8200 pF	48 751 10/8K2
			C22	20 pF	48 429 10/20E
			C23	3300 pF	48 751 10/3K3
			C24	125 pF	48 429 10/125E
			C26	100 pF	48 429 10/100E

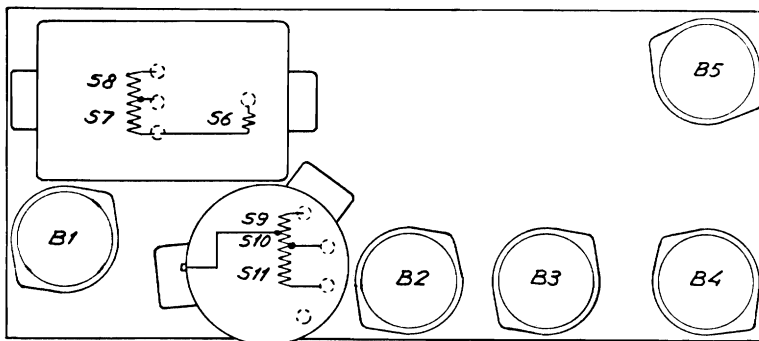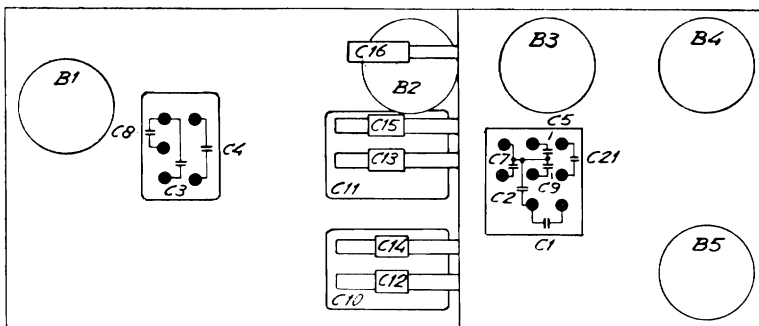

R11401



A	2950
B	2980

	B1	B2	B3	B4	B5	
	E 462	E 462	E 428	C 453	1823	
Va	160	155	75	150	—	V
Vg2	100	85	—	170	—	V
Ia	3	2	5	15,5	—	mA


S1, S2, S3, S4	25 648 37.0	S13, S14	—
S6, S7, S8	—	S15	—
S9, S10, S11	—	S17	25 727 99.0
S12	25 728 44.0*	S18	—

VC2 = 170 V.


Copyright
N.V. Philips Gloeilampenfabrieken,
Eindhoven
Imprimé en Hollande

93 951 48.1

870 A

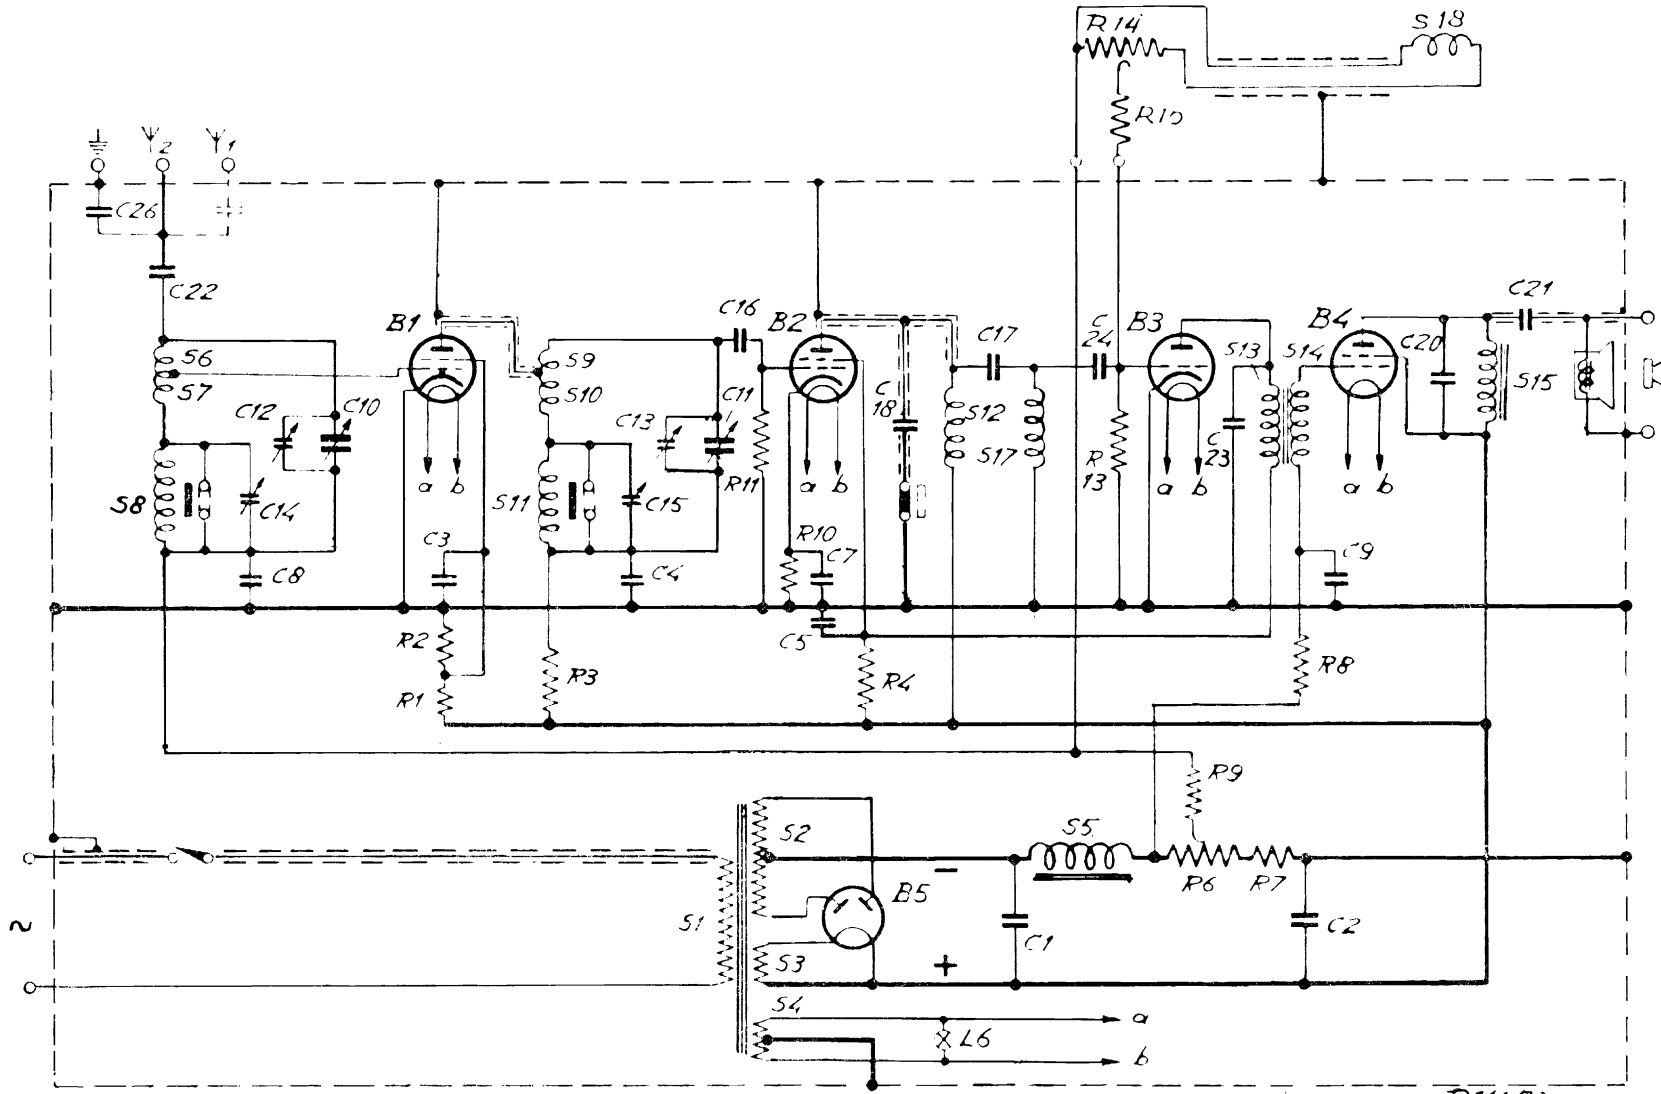


R11693




R11684

B1 B2




E462

B3




E428

B4



C453

B5



1823