


# PHILIPS-SERVICE

# 925 X


13.8—51 m  
175—585 m  
708—2000 m

9640—55. Z=7Ω  
110 V, 125 V, 145 V  
200 V, 225 V, 245 V  
74 Watt

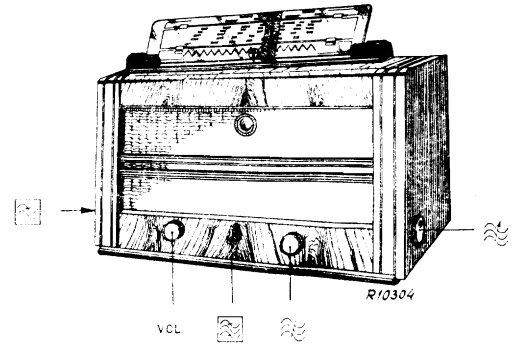

708—2000 m	A	175—585 m	B	708—2000 m	B	
  C6, C7, C8 min. 128 kc/s—33000 pF-g1B2  C 62, 61, 52, 51 max.		  C6, C7, C8 + 15° 1600 kc/s—Y  C38, C28, C18 max. -25 pF—aB2  546 kc/s—Y  C6, C7, C8 546 kc/s		  -25 pF—aB2  160 kc/s—Y  C6, C7, C8 160 kc/s  C50 max.		
708-2000m	C					
  C6, C7, C8 min. 128kc/s—Y  C91 min.		  C48 max.  C6, C7, C8 + 15° 1600 kc/s—Y  C38, C28, C18 max.				
175-585m	D					
  1154 kc/s—Y  C6, C7, C8 1154 kc/s  260m						

15° = 09 992 44.0

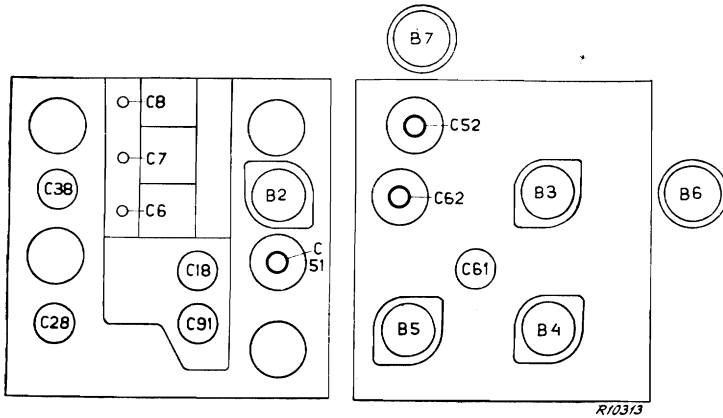

	B2	B3	B4	B5	B6	B7
	ECH 21	ECH 21	EBL 21	EBL 21	AZ 1	EM 4
Va	aT 125 aH 275	aT 90 aH 275	250	260		30 30
Vg2 (+4)	80	100	275	275		275
Vk	185	1,6	0	0		0
Ia	aT 2,6 aH 2,7	aT 1,5 aH 5	20,5	22		0,25 0,25
Ig2 (+4)	6,3	2,9	2,7	3		1

C1	45 μF	49 025 22.0	R1	120 Ω	49 363 16.0
C2	45 μF	40 025 22.0	R11	0,5 MΩ	49 472 26.0
C6	11-490 pF		R21	0,65 MΩ	49 479 36.0
C7	11-490 pF	49 000 65.0	R22	0,2 MΩ	49 479 36.0
C8	11-490 pF		R23	50000 Ω	49 470 45.0
C14	3.3 pF	40 055 10.0	R31	0,1 MΩ	49 375 48.0
C18	20 pF	49 005 65.2	R32	0,1 MΩ	49 377 48.0
C28	20 pF	49 005 65.2	R32	82000 Ω	49 377 47.0
C38	20 pF	49 005 65.2	R33	39000 Ω	49 377 43.0
C40	39 pF	49 057 16.0	R34	33 Ω	49 375 06.0
C47	1360 pF	49 057 44.0	R35	1,2 MΩ	49 376 61.0
C48	200 pF	28 212 08.1	R36	0,12 MΩ	49 377 49.0
C49	390 pF	49 055 35.0	R37	1 MΩ	49 376 60.0
C50	200 pF	28 212 08.1	R38	0,68 MΩ	49 375 58.0
C51	70-100 pF		R41	56000 Ω	49 375 45.0
C52	70-100 pF		R42	0,22 MΩ	49 375 52.0
C61	70-100 pF	49 005 01.1	R50	15000 Ω	49 375 58.0
C62	70-100 pF		R51	0,12 MΩ	49 375 49.0
C72	47000 pF	49 127 61.0	R52	2700 Ω	49 375 29.0
C73	100 pF	28 185 68.1	R53	0,68 MΩ	49 375 58.0
C81	18 pF	49 055 19.0	R55	0,27 MΩ	49 375 53.0
C82	120 pF	49 055 29.0	R56	0,82 MΩ	49 375 59.0
C83	10000 pF	49 128 57.0	R57	1,5 MΩ	49 376 62.0
C91	70-100 pF	49 005 06.0	R58	56000 Ω	49 375 45.0
C92	12000 pF	49 127 15.0	R59	12000 Ω	49 375 37.0
C93	39000 pF	49 127 21.0	R60	0,1 MΩ	49 375 48.0
C100	33 pF	49 057 05.0	R62	470 Ω	49 376 20.0
C101	10 pF	49 055 16.0	R62	560 Ω	49 376 21.0
C102	47000 pF	49 127 61.0	R63	0,68 MΩ	49 375 58.0
C103	68 pF	49 055 26.0	R64	2 × 4,7 MΩ =	
C104	470 pF	49 055 36.0		9,4 MΩ	49 377 68.0
C105	47000 pF	49 128 61.0	R65	0,39 MΩ	49 375 55.0
C106	6,8 pF	49 055 14.0	R66	0,82 MΩ	49 375 59.0
C107	6800 pF	49 127 56.0	R72	150 Ω	49 375 14.0
C108	0,1 pF	49 127 63.0	R73	180 Ω	49 375 15.0
C112	5600 pF	49 127 11.0	R81	47000 Ω	49 375 44.0
C114	150 pF	49 055 30.0	R82	0,12 MΩ	49 375 49.0
C116	18000 pF	49 127 17.0	R83	68000 Ω	49 375 46.0
C117	0,39 μF	49 127 33.0	R84	0,12 MΩ	49 375 49.0
C118	0,1 μF	49 127 63.0	R85	0,22 MΩ	49 375 52.0
C119	2200 pF	49 126 51.0	R86	27000 Ω	49 375 41.0
C120	2200 pF	49 126 51.0	R91	1 MΩ	49 376 60.0
C121	12000 pF	49 128 15.0	R92	1 MΩ	49 376 60.0
C122	47000 pF	49 127 61.0	R93	56000 Ω	49 377 45.0
C123	47000 pF	49 128 61.0	R94	1,5 MΩ	49 376 62.0
C124	6,8 pF	49 055 14.0			
C125	0,1 μF	49 127 63.0			
C126	82000 pF	49 127 25.0			
C131	22000 pF	49 129 90.0			

S1, S2, S3, S4	A1 056 98.0	925 X-03	A R72	A2 075 53.0 49 375 16.0
S13, S14, S28, S30	A1 037 29.0			
S17, S18, S19, S20	A1 037 28.0			
S33, S34	A1 037 67.0			
S37, S38, S39, S40	A1 037 68.0			
S51, C51	A1 037 31.2			
S53, S54, S55,				
S56, C52	A1 038 34.2			
S61, S62, S63, C62	A1 037 44.2			
S71	A1 108 21.0			
S81, S82, S83,				
S84, S85, S86	A1 082 10.0			
S91	28 587 88.0			
S92, S93,	28 587 71.0			

# 925 X

