

PHILIPS SERVICE

BX 180 U-00,-03,-04


185—580 m (1620—517 kc/s)

9730 X Z = 5 Ω

220 V



38 W

452 kc/s

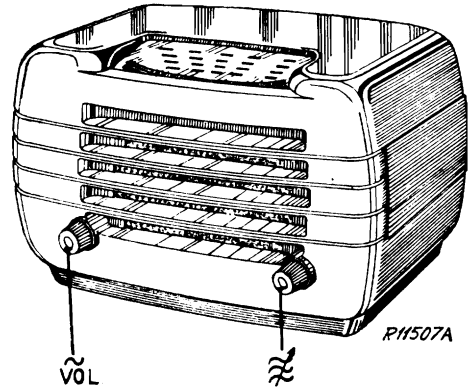

185—580 m I		185—580 m III	
VOL. max		VOL. max	
C3, C4 max		C3, C4 max	
452 kc/s-33000 pF-g1B1	↑	0	
S9/S9a max	: ↑	1550 kc/s	
S7/S8 max	: ↑	1550 kc/s— Y	
S5/S5a max	⊖	C9, C7 max. :	
S6/S6a max	↑	550 kc/s	
	⊖	550 kc/s— Y	
	⊖	C10 max	

1948

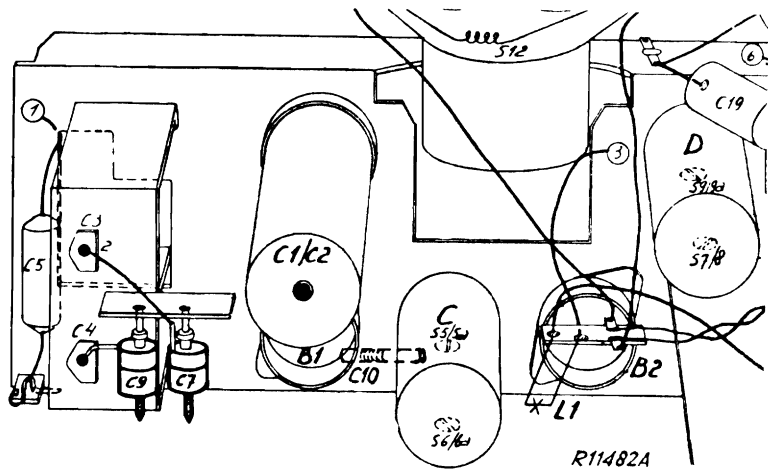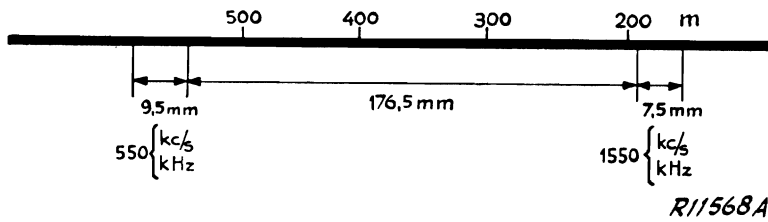

R1	4700 Ω	48 468 10/4K7	C1	50 μF	48 317 08/50+50		
R2	1080 Ω	49 364 69.2	C2	50 μF			
R3	180 Ω		C3	12-492 pF		49 001 13.2	
R4	22000 Ω	48 555 10/22K	C4	12-492 pF			
R5	10000 Ω	48 427 10/10K	C5	1000 pF		48 757 20/1K	
R6	1,5 MΩ	48 555 10/1M5	C6	47000 pF		48 750 10/47K	
R7	10 MΩ	48 427 10/10M	C7	30 pF		28 212 36.4	
R8	47000 Ω	48 555 10/47K	C8	33000 pF		48 752 10/33K	
R9	0,5 MΩ	49 500 11.0	C9	30 pF		28 212 36.4	
R10	0,68 MΩ	48 555 10/680K	C10	400-575 pF		49 005 55.2	
R11	330 Ω	48 426 10/330E	C11	0,1 μF		48 751 10/100K	
R12	18000 Ω	48 555 10/18K	C12	115 pF		48 203 10/82E	
R14	4,7 MΩ	48 426 10/4M7	C13	115 pF			
			C14	115 pF			
			C15	115 pF			
			C16	82 pF			
			C17	10000 pF			48 750 10/10K
			C18	50 μF			48 313 22/50
			C19	4700 pF			48 757 20/4K7
			C20	1000 pF			48 757 20/1K
			C21	470 pF			48 203 10/470E


	B1	B2	B3	
	UCH 41	UAF 42	UL 41	
Va	H 94 T 67	94	150	V
Vg2(4)	67	67	94	V
Ia	H 2,35 T 2,5	4,3	27,5	mA
Ig2(4)	2,7	1,3	3,3	mA

S1, S2	A3 111 17.1		
S3, S4	A3 111 18.1		
S5, S6, C12, C13	A3 121 94.2		
S7, S8, S9,	A3 121 94.2		
C14, C15	A3 151 57.1		
S10, S11	A3 151 57.1		
L1	8034D-00		

VC1 = 186 V, VC2 = 94 V


Copyright
N.V. Philips' Gloeilampenfabrieken, Eindhoven
Imprimé en Hollande

BX 180 U

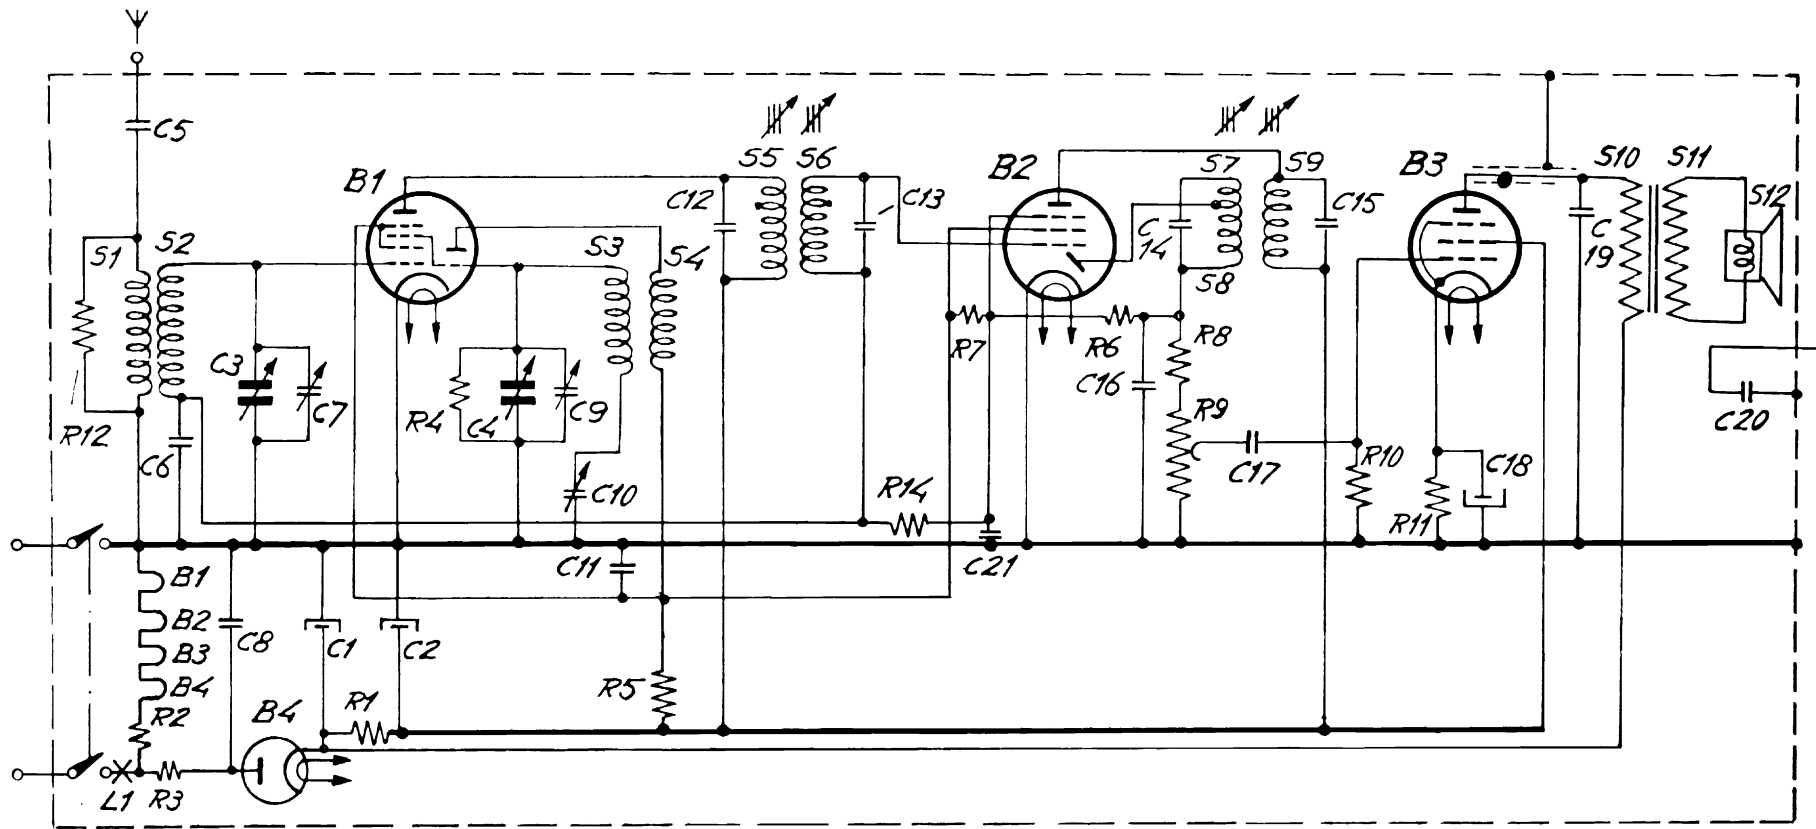


R11290A


UCH 11



UAF 41



UL 41



UY 41

