


PHILIPS SERVICE

122 ABC

200—585 m

9688 $Z = 5 \Omega$
 110 V, 125 V, 200 V, 225 V.
 19 W.
 110 V, 125 V, 200 V, 230 V.
 15 W.
 V_a 90 V, V_f 4,5 V.
 I_a 10 mA, $I_f = 50$ mA

452 kc/s




R11328

VOL.

200—585 m	I	200—585 m	III	200—585 m	V
VOL. max.		VOL. max.		VOL. max.	
C6, C7 min.		C6, C7 + 15°		857 kc/s—S102	
452 kc/s-33000 pF-g4B2		1442 kc/s — ∇		(inductive)	
S62/S63, S52, S51 max.		C38, C105 max.		C6, C7 \curvearrowright 857 kc/s	
		550 kc/s—S102		\uparrow \curvearrowright 350 m	
		(inductive)			
		C6, C7 \curvearrowright 550 kc/s			
		S103 max.			
		1442 kc/s—S102			
		(inductive)			
		C6, C7 \curvearrowright 1442 kc/s			
		C105 max.			

R1	56 Ω	48 427 10/56E	C1	100 μ F	49 032 02.0
R2	820 Ω	48 469 05/820E	C2	100 μ F	49 032 02.0
R3	1000 Ω	48 469 05/1K	C3	100 μ F	28 185 6E.1
R4	560 Ω	48 468 05/560E	C4	12,5 μ F	49 020 02.1
R5	33 Ω	48 426 10/33E	C6		49 000 35.0
	1200 Ω	48 467 10/1K2	C7	11-490 pF	
R11	0,28 M Ω	49 500 09.0	C38	20 pF	—
	0,07 M Ω		C47	520 pF	48 406 05/520E
R31	15000 Ω	48 425 10/15K	C51	103 pF	—
R32	56000 Ω	48 425 10/56K	C52	97 pF	—
R33	0,82 M Ω	48 425 10/820K	C62	106 pF	—
R34	1,5 M Ω	48 425 10/1M5	C82	100 pF	48 406 20/100E
R35	0,56 M Ω	48 425 10/560K	C83	6800 pF	48 751 20/6K8
R36	0,82 M Ω	48 425 10/820K	C84	6800 pF	48 751 20/6K8
R37	0,33 M Ω	48 425 10/330K	C85	2200 pF	48 751 20/2K2
R38	2200 Ω	49 362 11.0	C100	47000 pF	48 750 20/47K
R39	330 Ω	48 467 10/330E	C101	0,1 μ F	48 751 20/100K
R40	220 Ω	48 425 10/220E	C102	6800 pF	48 751 20/6K8
R41	270 Ω	48 425 10/270E	C103	0,47 μ F	48 750 20/470K
R42	0,82 M Ω	48 425 10/820K	C104	18 pF	48 406 10/18E
R01	33000 Ω	48 425 10/33K	C105	2,5—20 pF	49 005 05.2
			C106	10 pF	49 055 02.1
			C107	100 pF	48 406 10/100E
			C108	22000 pF	48 756 20/22K

15° 09 992 44.0

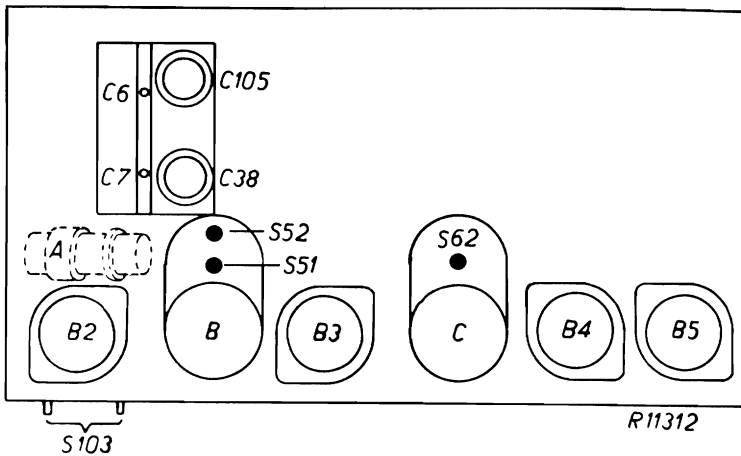

R11312

220 V ~

	B2	B3	B4	B5	
	DK 21	DF 21	DAC 21	DL 21	
V_a	105	105	45	95	V
V_{g5}	105	—	—	—	V
V_{g2}	77	105	—	105	V
V_{g1}	0	1,4	—	2,8	V
I_a	2,5	1,65	0,08	5,6	mA
I_{g5}	0,5	—	—	—	mA
I_{g2}	1,9	0,44	—	1,1	mA

V_{C1} = 125 V V_{C2} = 110 V

S37, S38	A1 000 96.0	S81, S82	A1 081 56.0
S51, S52, C51, C52	A1 036 57.2	S100	A1 151 12.0
S61, S62, S63, C62	A1 036 49.4	S102	A1 000 99.1
S76	49 981 03.0	S103	A1 000 98.1
		X	A2 061 49.0

S:	103.102.	51. 52.38.37. 100	61. 62.63.	81.82.76.
C:	106. 105.6.107.100	108. 51.104.38.1747.52.4.102.109.2.103.	3. 62.84.82.	101. 83. 85.
R:	1.242.34.41. 81.	38.39.5. 3143. 40.	33.32.11. 37.3444.	35. 36

122 ABC

